

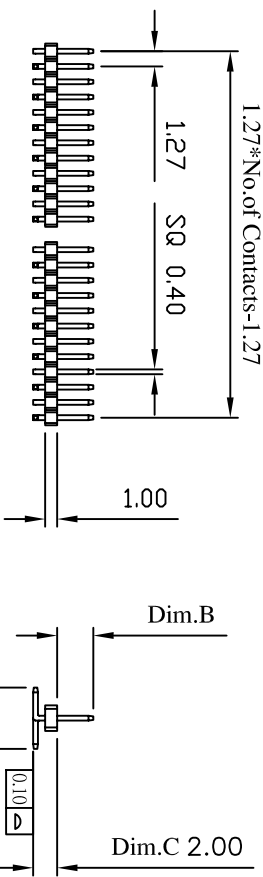




A Type

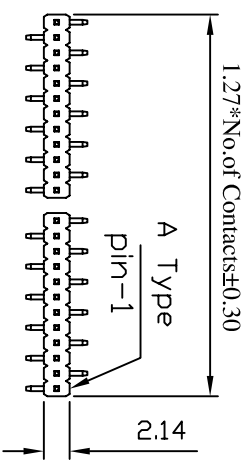


A Type
Recommended P.C. Board
SMD Layout

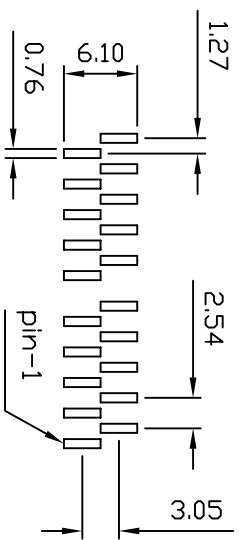

B Type

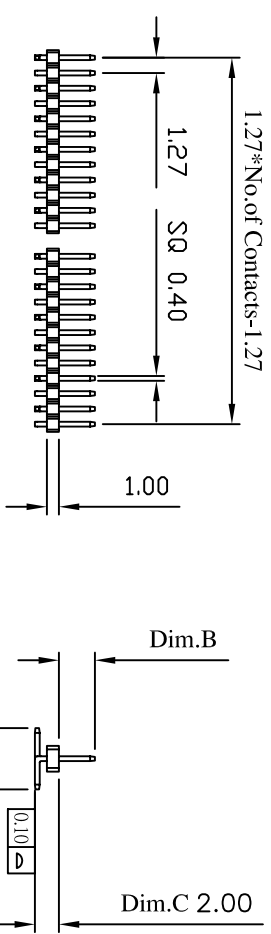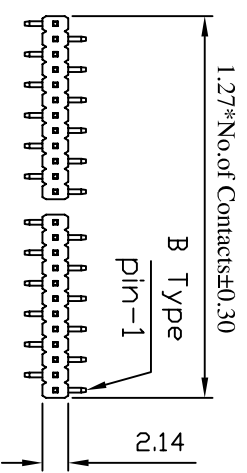

B Type
Recommended P.C. Board
SMD Layout

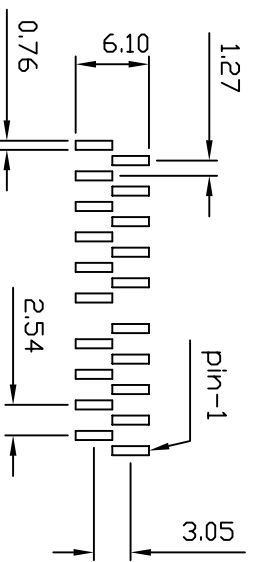

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over
 Standard: Nylon-6T

<RoHS Compliant>

H3 N 11 X - 1 XX DX BK X 000 B
 1 2 3 4 5 6 7 8

1. Insulator Material: 4. Tall Style:

N= Nylon-6T DA= SMD A Type

2. P = Phosphor Bronze DB= SMD B Type

Blank=Brass 5. Color: BK=Black

3. Per Row 03-50 pin

WH=White

6. Contact Plated:

C=Gold Flash

A=Gold 3u'

D=Gold 5u'

G=Gold 10u'

L=Gold 15u'

U=Gold 30u'

7. Special Options

8. Packing:

B= Tube

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N11X-1XXDXBKX001B	5.10mm	3.00mm	2.00mm
H3N11X-1XXDXBKX002B	5.10mm	1.80mm	2.00mm



CONN TOP
COMPONENT INC.

PART NO H3N11X-1XXDXBKX000B

.X .XX .XXX
0.3 0.20 0.100

1: H3N11-1XXBKHX0-D

DRAWING NO

PHB-00215

EDITION: C

ITEM: PHB

BOM 2: QT-0.4X6.30BN

DRAWN BY

LN

2008/11/06

SCALE: 1:1

TEL: (02)86481727 FAX: (02)86482427

APPROVAL BY

UNIT: m.m