

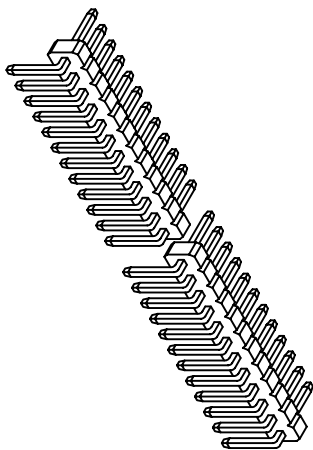
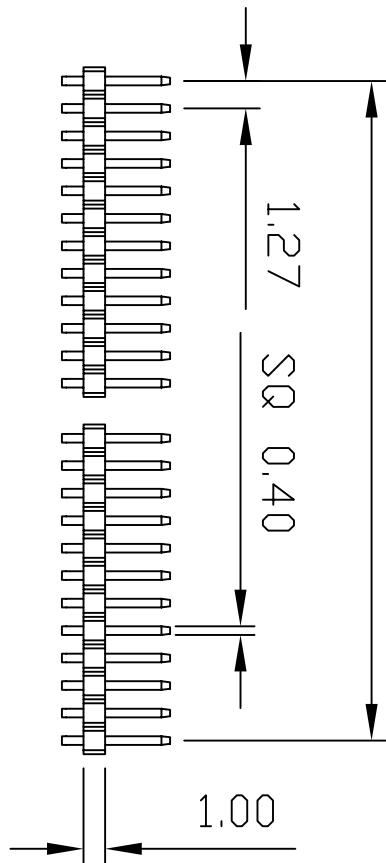
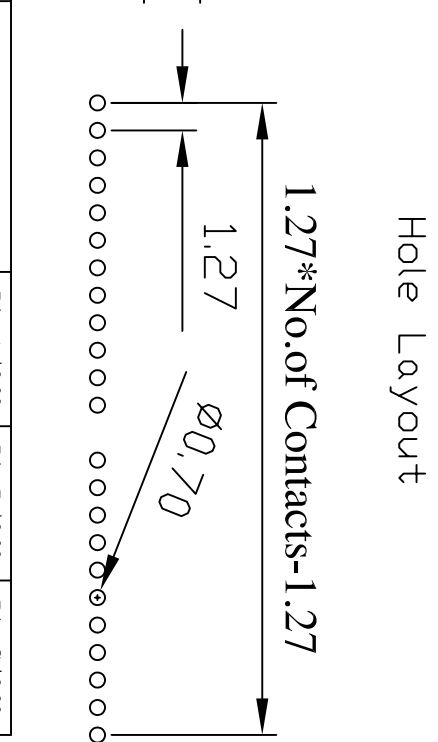


1.27*No.of Contacts-1.27

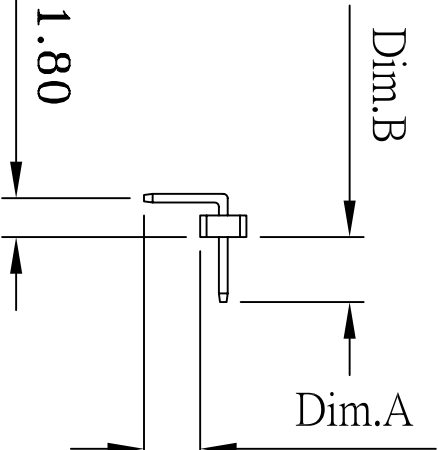

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester; UL 94V-0
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

1.27*No.of Contacts±0.3

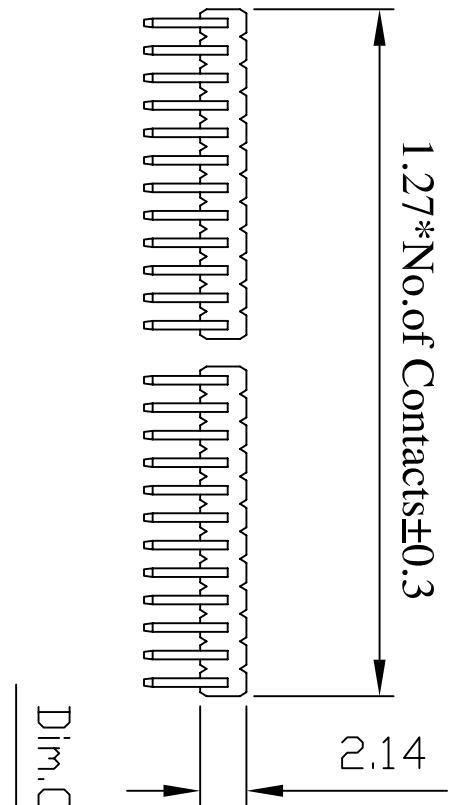

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N11X-1XXR0BKX001X	2.60mm	3.00mm	1.8mm
H3N11X-1XXR0BKX002X	2.60mm	1.80mm	1.8mm
H3N11X-1XXR0BKX003X	1.50mm	3.00mm	1.8mm
H3N11X-1XXR0BKX004X	1.50mm	1.80mm	1.8mm

(RoHS Compliant)

H3 N 11 X - 1 XX R0 BK X 000 X
 1 2 3 4 5 6 7 8

1. Insulator Material:

N= Nylon-6T

4. Tail Style:

R0= Right Angle

6. Contact Plated:

- 2. P= Phosphor Bronze
- Blank=Brass
- 3. Per Row 03-50 pin

- 5. Color: BK=Black
- VH=White

7. Special Options

- A = PE Bag
- B= Tube
- D = Box



CONN TOP COMPONENT INC.

PART NO

H3N11X-1XXR0BKX000X

X

0.3

.XX .XXX
0.20 0.100

DRAWING NO

PHB-00214

EDITION: C

ITEM: PHB

DRAWN BY

GARY

2008/11/06

SCALE: 1:1

APPROVAL BY

UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427