
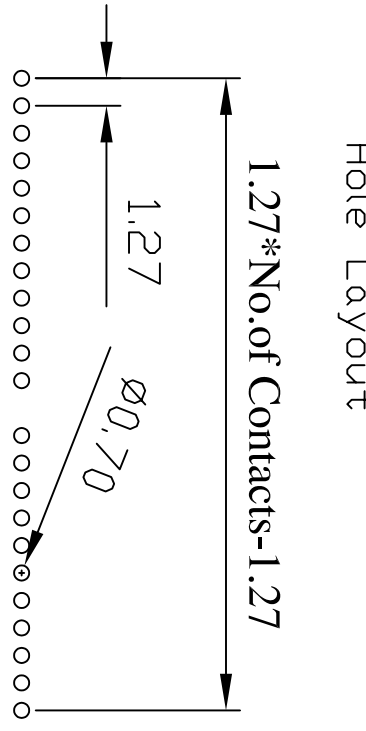


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester; UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

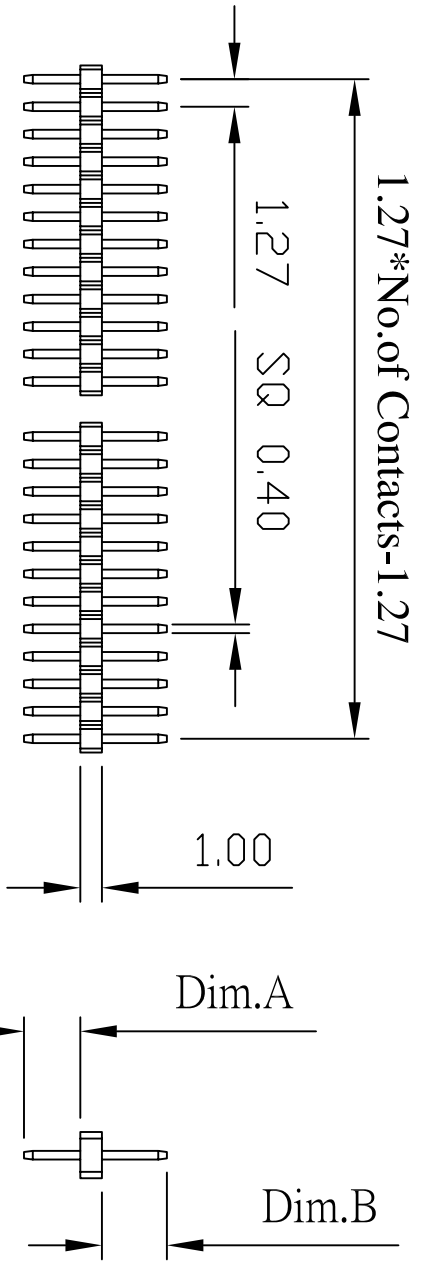

Part No.	Dim.A±0.20	Dim.B±0.20
H3N11X-1XXS0BKX001X	2.60mm	3.00mm
H3N11X-1XXS0BKX002X	2.60mm	1.80mm
H3N11X-1XXS0BKX003X	1.50mm	3.00mm
H3N11X-1XXS0BKX004X	1.50mm	1.80mm

(RoHS Compliant)

1. Insulator Material: H3 N 11 X - 1 XX S0 BK X 000 X
 N = Nylon-6T
 1 2 3 4 5 6 7 8

2. P = Phosphor Bronze
 Blank=Brass
 5. Color: BK=Black
 WH=White

3. Per Row 03-50 pin

4. Tail Style: S0 = Straight

6. Contact Plated: C=Gold Flash
 A=Gold 3u"
 D=Gold 5u"
 G=Gold 10u"
 L=Gold 15u"
 U=Gold 30u"

7. Special Options: A = PE Bag
 B = Tube
 D = Box

		PART NO		H3N11X-1XXS0BKX000X	
1:	H3N11-1XXBKHO-D	DRAWING NO	PHB-00212	EDITION:	C
2:	QT-0.4XXXXBN	DRAWN BY	LIN	2008/11/06	SCALE: 1:1
3:		APPROVAL BY			UNIT: m.m
TEL: (02)86481727 FAX: (02)86482427					