


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

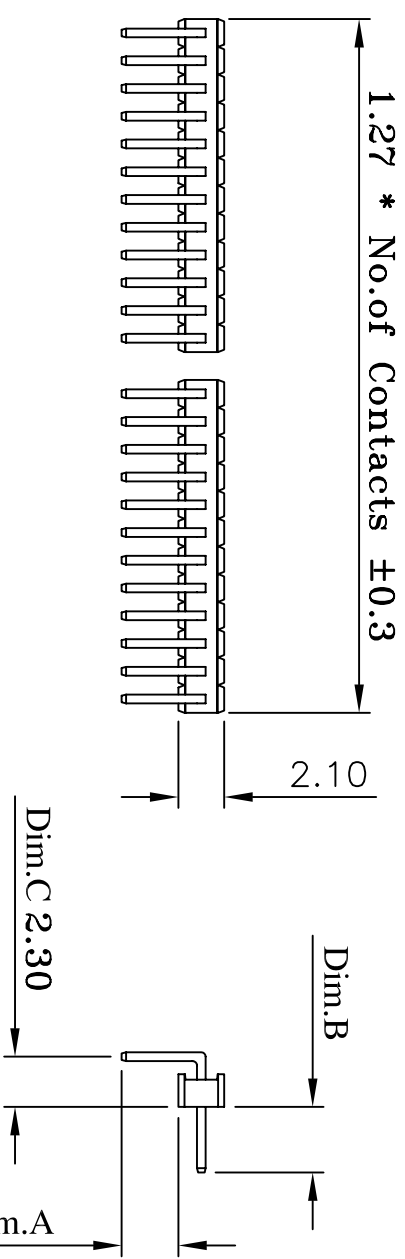

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N15X-1XXR0BKX001X	2.60mm	3.00mm	2.30mm
H3N15X-1XXR0BKX002X	2.60mm	1.80mm	2.30mm
H3N15X-1XXR0BKX003X	1.50mm	3.00mm	2.30mm
H3N15X-1XXR0BKX004X	1.50mm	1.80mm	2.30mm

(RoHS Compliant) H3 N 15 X - 1 XX R0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material:
 N = Nylon-6T
 2. P = Phosphor Bronze
 Blank = Brass
 3. Per Row 02~50 pin
- Tail Style:
 R0 = Right Angle
 5. Color: BK=Black
 WH=White
- Contact Plated:
 C=Gold Flash
 A=Gold 3u"
 D=Gold 5u"
 G=Gold 10u"
 L=Gold 15u"
 U=Gold 30u"
- Special Options:
 A = PE Bag
 B = Tube
 D = Box

①:H3N15-1XXR0BKX000X-2007/11/20-C1			
CONN TOP COMPONENT INC.		PART NO	H3N15X-1XXR0BKX000X
1: H3N15-1XXBKHO	DRAWING NO	PHB-00064	EDITION: C2
2: QT-0.40X XXXBN	DRAWN BY	GARY	2008/08/11
3: 0	APPROVAL BY		
TEL:(02)86481727	FAX:(02)86482427		
.X	±0.3	.XX	±0.20
.XXX	±0.100	.XXX	±0.100
ITEM: PHB	SCALE: 1:1	UNIT: m.m	