

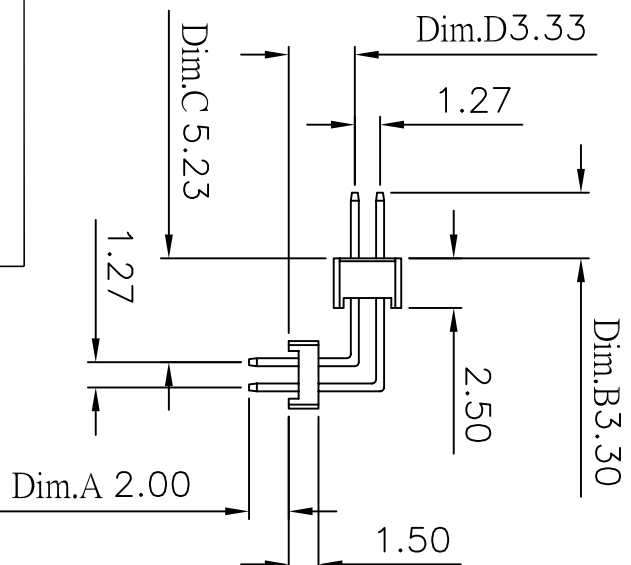
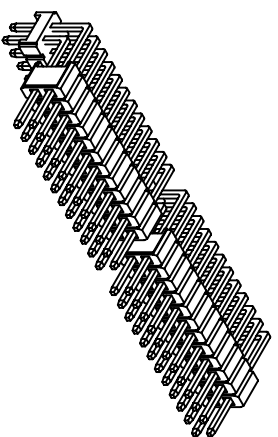


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

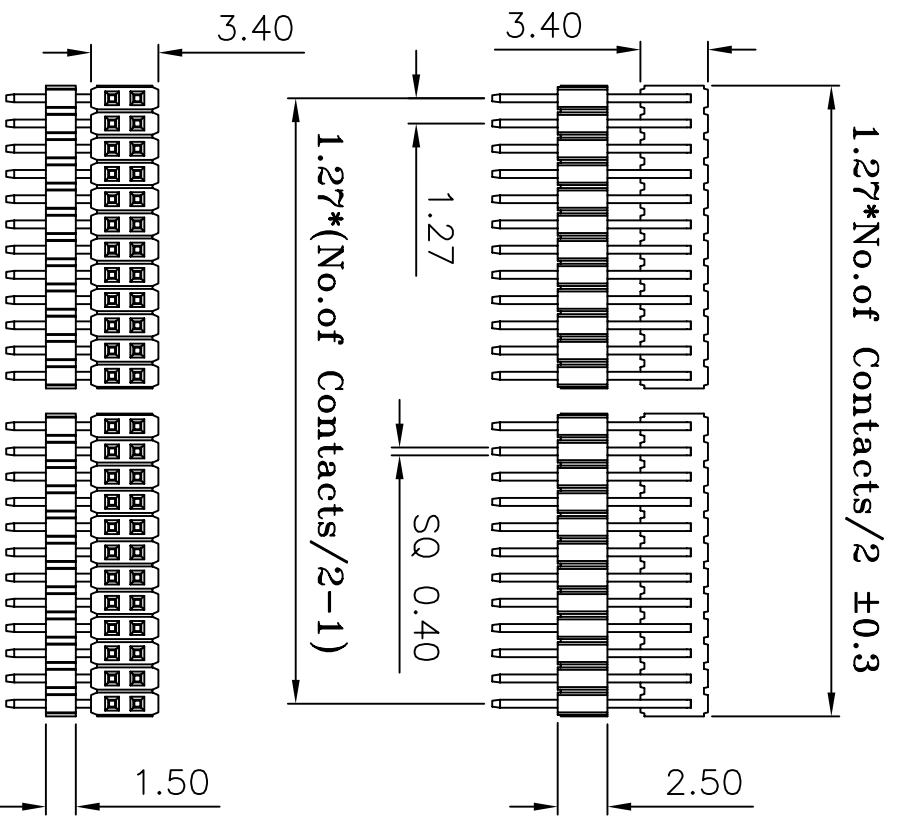

Recommended P.C. Board Hole Layout

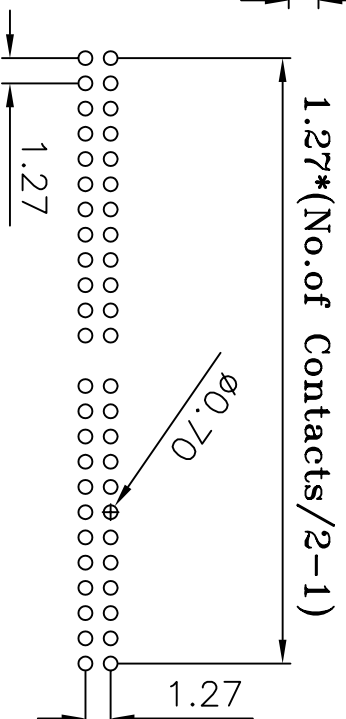

(RoHS Compliant)

H3 N 15 X - 2 XX R0 BK X D01 X
 1 2 3 4 5 6 7 8

- Insulator Material:
N= Nylon-6T
- P= Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style:
R0= Right Angle
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options
A= PE Bag
D= Box
- Packing:
A= PE Bag
D= Box



CONN TOP
COMPONENT INC.

©:H3N15-2XXR0BKXD01-2007/02/27-C

1:	H3N15-2XXRKH0	PART NO	H3N15X-2XXR0BKXD01X	.X	±0.3	.XXX	±0.100
2:	H3N25-2XXRKH0	DRAWING NO	PHB-00072	EDITION:	C1	ITEM:	PHB
3:	QT-040X5.30BN	DRAWN BY	GARY	2009/01/21	SCALE:	1:1	
4:	QT-040X6.80BN	APPROVAL BY				UNIT:	m.m

TEL: (02)86481727 FAX: (02)86482427