


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40 ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over
 Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area

**Recommended P.C. Board
 Hole Layout**

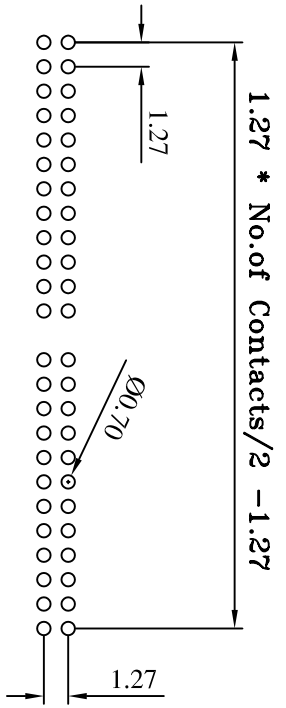

(RoHS Compliant)

H3	N	15	X	-	2	XX	S0	BK	X	D03	X
1	2	3	4	5	6	7	8				

- 1. Insulator Material: N=Nylon-6T
- 2. P=Phosphor Bronze
- 3. Per Row 02-40 pin
- 4. Tail Style: R0=Right Angle
- 5. Color: BK=Black, WH=White
- 6. Contact Plated: C=Gold Flash, A=Gold 3u", D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- 7. Special Options: A=PE Bag, D=Box
- 8. Packing:

		PART NO		H3N15X-2XXXS0BKXD03X		.X		.XX		.XXX	
BOM 1:		H3N15-2XXXBKHO		DRAWING NO		PHB-00239		EDITION:		C	
BOM 2:		QT-0.4X22.80BN		DRAWN BY		GARY		2009/08/17		SCALE: 1:1	
BOM 3:				APPROVAL BY						UNIT: m.m	
TEL: (02)86481727 FAX: (02)86482427											