

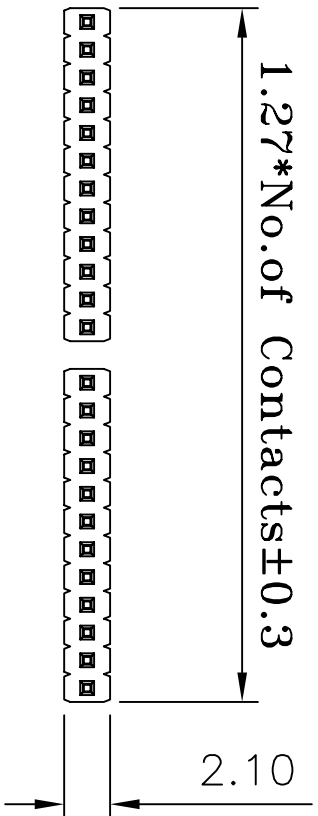


1.27*No.of Contacts±0.3

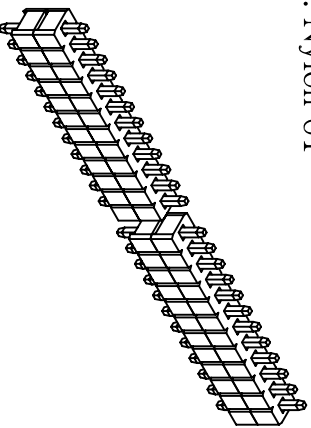


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester; UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

1.27*No.of Contacts-1.27

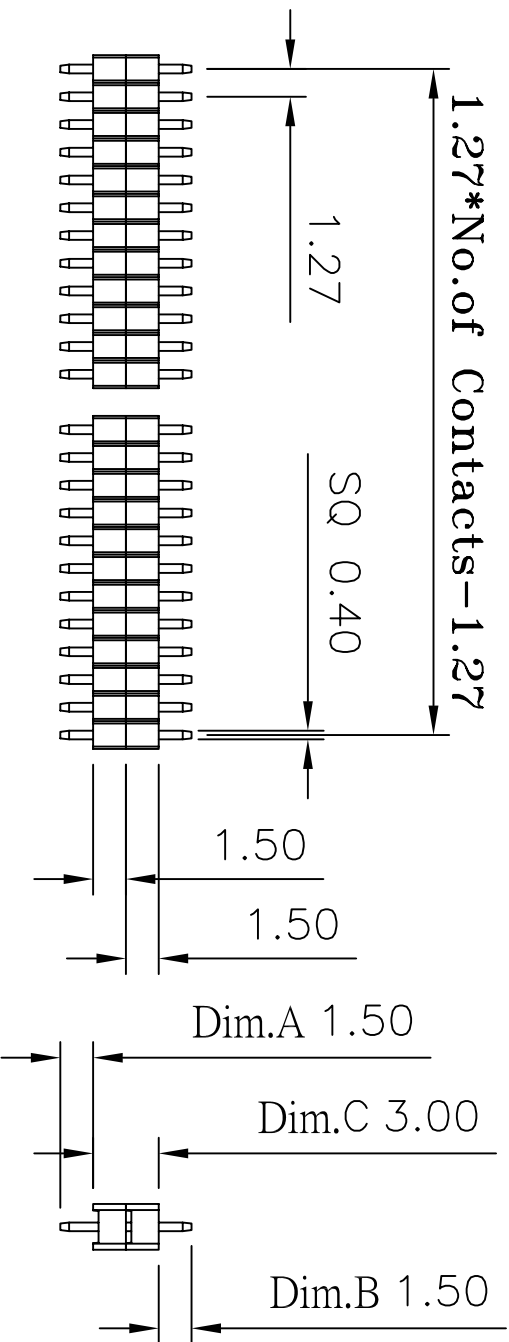

Recommended P.C. Board Hole Layout

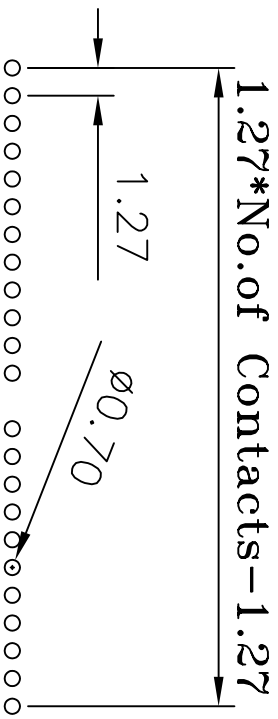

(RoHS Compliant)

H3 N 15 X - 1 XX S0 BK X D01 X
 1 2 3 4 5 6 7 8

- Insulator Material:
N = Nylon-6T
- P = Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style:
SO = Straight
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options:
A = PE Bog
B = Tube
D = Box

CONN TOP COMPONENT INC. ©:H3N15-1XXXS0BKXD01-2007/02/29-C		PART NO		H3N15X-1XXXS0BKXD01X		.X		.XXX	
I: H3N15-1XXXBKHO BOM 2: QT-0.40X6.00BN 3: 0		DRAWING NO		PHB-00130		EDITION: C1		ITEM: PHB	
TEL: (02)86481727 FAX: (02)86482427		DRAWN BY		GARY		2009/01/21		SCALE: 1:1	
APPROVAL BY								UNIT: m.m	