


Recommended P.C. Board Hole Layout

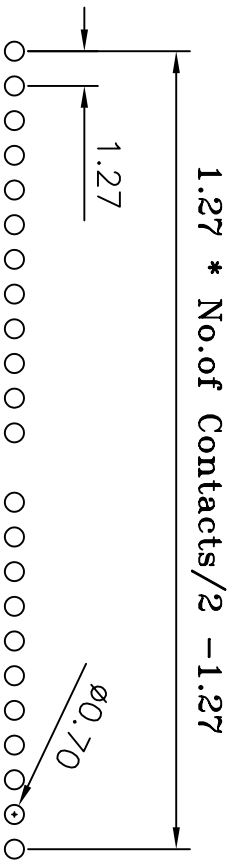

Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over  
 Standard: Nylon-6T

(RoHS Compliant) H3 N 15 A X - 1 XX S0 BK X D02 X  
 1 2 3 4 5 6 7 8

1. Insulator Material: 4. Tail Style: 6. Contact Plated: 7. Special Options  
 N = Nylon-6T S0 = Straight C=Gold Flash A=Gold 3u" D=Gold 5u" G=Gold 10u" L=Gold 15u" U=Gold 30u"  
 2. P = Phosphor Bronze 5. Color: BK=Black WH=White A = PE Bog D = Box  
 Blank=Brass WH=White U=Gold 30u"

3. Per Row 02~50 pin

		PART NO		H3N15AX-1XXS0BKXD02X		.X		.XXX	
DRAWING NO		PHB-00236		EDITION: C		ITEM: PHB			
DRAWN BY		GARY		2009/06/22		SCALE: 1:1		UNIT: m.m	
APPROVAL BY									
TEL: (02)86481727 FAX: (02)86482427									