

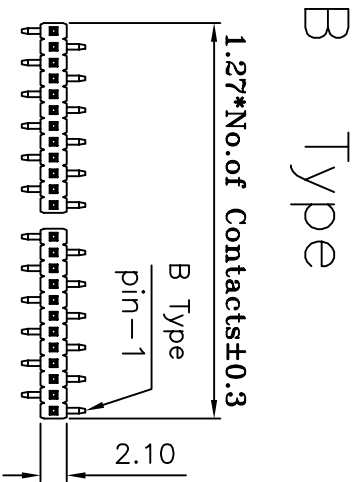
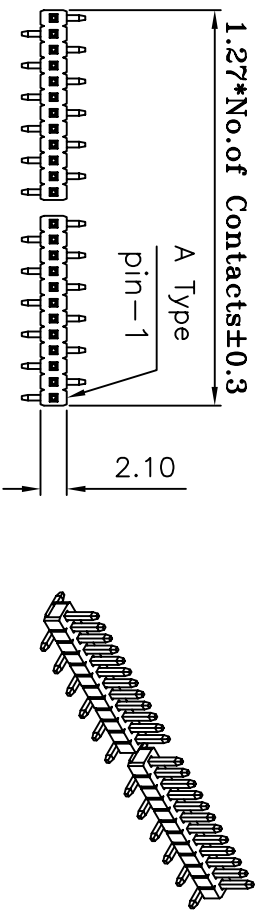



A Type

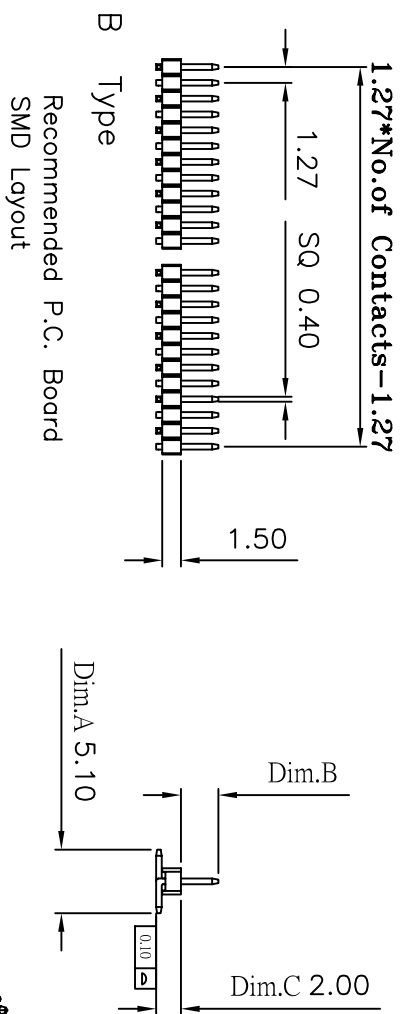

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

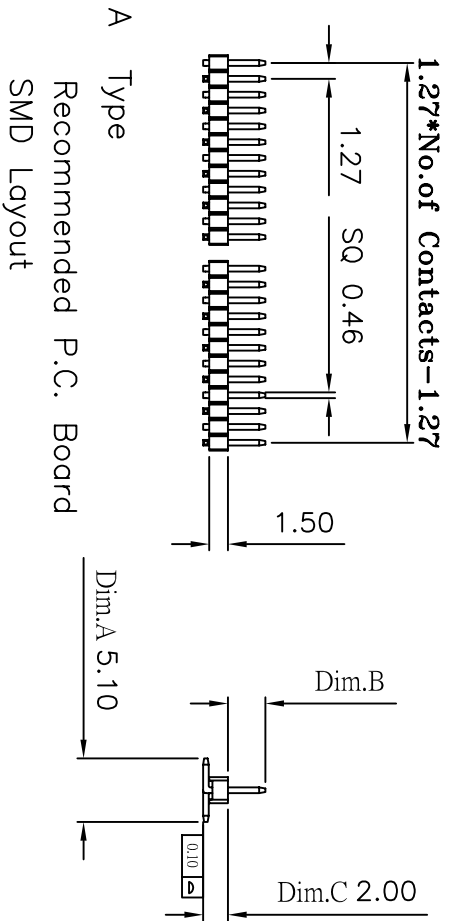

(RoHS Compliant) H3 N 15 A X - 1 XX DX BK X 000 B
 1 2 3 4 5 6 7 8

- Insulator Material: N= Nylon-6T
- P= Phosphor Bronze
- Per Row 03~50 pin
- Tail Style: DA= S.M.D A Type
- Color: BK=Black
- WH=White
- Contact Plated: C=Gold Flash
- Special Options: B= Tube

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N15AX-1XXDXBKX001B	5.10mm	3.00mm	2.00mm
H3N15AX-1XXDXBKX002B	5.10mm	1.80mm	2.00mm

CONN TOP COMPONENT INC.			
1: H3N15A-1XXXBKHO	DRAWING NO	PHB-00178	EDITION: C1
2: QT-0.46X XXBN	DRAWN BY	GARY	2009/02/03
3: 0	APPROVAL BY		
PART NO		H3N15AX-1XXDXBKX000B	X ±0.3
			.XX ±0.20
			.XXX ±0.100
			ITEM: PHB
			SCALE: 1:1
			UNIT: m.m

①:H3N15A-1XXDXBKX000-2007/12/03-C
 TEL:(02)86481727 FAX:(02)86482427