
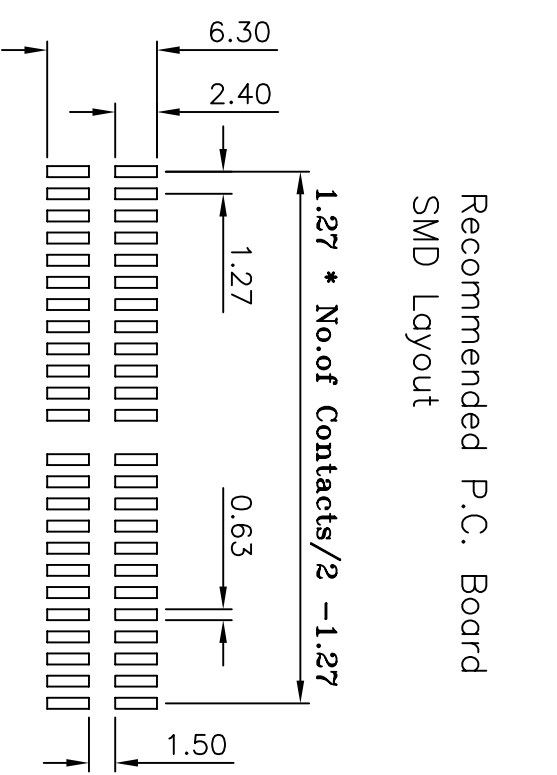
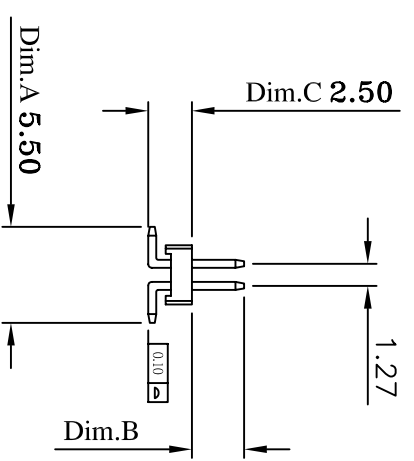


**Current Rating:** 1 Amps  
**Insulator Resistance:** 5000 Megohms min  
**Contact Resistance:** 20 m ohms max  
**Dielectric Withstanding:** 500 V AC  
**Operating Temperature:** -40° ~ +105° C  
**Max Processing Temp:** 230° C for 60 seconds  
**Max Processing Temp:** 260° C for 10 seconds  
**Contact Material:** Copper Alloy  
**Insulator Material:** Polyester, UL 94V-0  
**Finish:** Tin, Gold Plated  
**Standard:** Nylon-6T

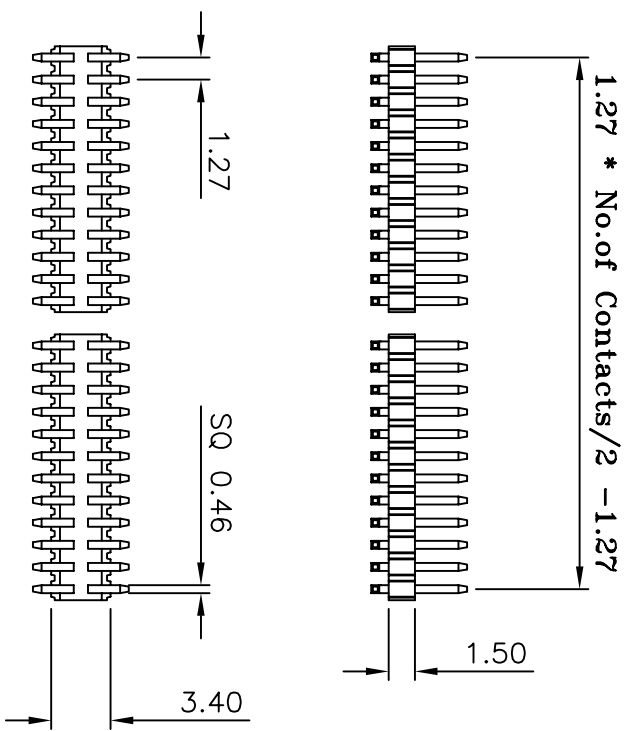

Recommended P.C. Board  
 SMD Layout

H3 N 15A X - 2 XX D0 BK X 000 B  
 (RoHS Compliant) 1 2 3 4 5 6 7 8

- Insulator Material:  
N= Nylon-6T
- P= Phosphor Bronze  
Blank=Brass
- Per Row 02~50 pin
- Tail Style:  
D0= S.M.D No Peg Type
- Color: BK=Black  
WH=White
- Contact Plated:  
C=Gold Flash  
A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"
- Special Options  
B= Tube
- Packing:

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N15AX-2XXD0BKX001B	5.50mm	3.00mm	2.50mm
H3N15AX-2XXD0BKX002B	5.50mm	1.80mm	2.50mm

		PART NO		H3N15AX-2XXD0BKX000B		.X		.XXX	
DRAWING NO		PHB-00225		EDITION: C		±0.3		±0.20	
DRAWN BY		GARY		2009/03/23		SCALE: 1:1		ITEM: PHB	
APPROVAL BY						UNIT: m.m			

TEL: (02)86481727 FAX: (02)86482427