


**Current Rating:** 1 Amps  
**Insulator Resistance:** 5000 Megohms min  
**Contact Resistance:** 20 m ohms max  
**Dielectric Withstanding:** 500 V AC  
**Operating Temperature:** -40° ~ +105° C  
**Max Processing Temp:** 230° C for 60 seconds  
**Max Processing Temp:** 260° C for 10 seconds  
**Contact Material:** Phosphor Bronze  
**Insulator Material:** Polyester, UL 94V-0  
**Standard:** Nylon-6T  
**Finish:** Tin, Gold Plated  
**Standard:** Gold Flash all over

Recommended P.C. Board  
 Hole Layout

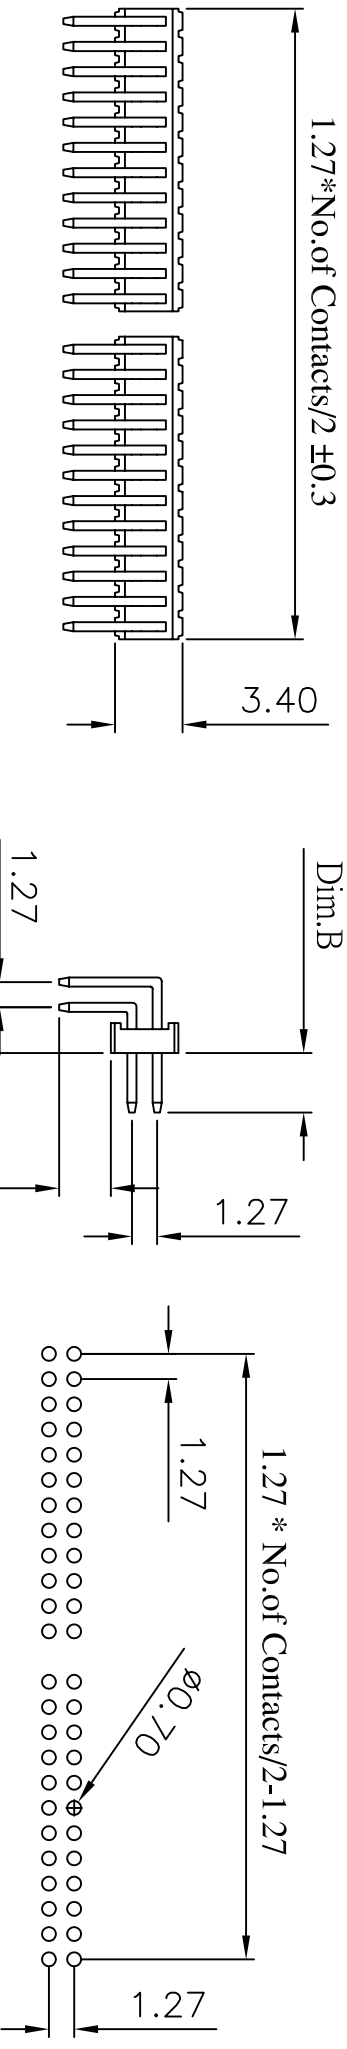

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N15AX-2XXR0BKX001X	2.60mm	3.00mm	2.30mm
H3N15AX-2XXR0BKX002X	2.60mm	1.80mm	2.30mm
H3N15AX-2XXR0BKX003X	1.50mm	3.00mm	2.30mm
H3N15AX-2XXR0BKX004X	1.50mm	1.80mm	2.30mm

(RoHS Compliant) H3 N 15 A X - 2 XX R0 BK X 000 X  
 ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓

- Insulator Material:  
N = Nylon-6T
- P = Phosphor Bronze  
Blank=Brass
- Per Row 02~50 pin
- Toill Style:  
R0 = Right Angle
- Color: BK=Black  
WH=White
- Contact Plated:  
C=Gold Flash  
A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"
- Special Options  
A = PE Bag  
B = Tube  
D = Box
- Packing:

CONN TOP COMPONENT INC. ①:H3N15A-2XXR0BKX000-2007/02/27-C			
PART NO	H3N15AX-2XXR0BKX000X	.X	.XXX
DRAWING NO	PHB-00079	±0.3	±0.20
DRAWN BY	GARY	EDITION: C1	ITEM: PHB
APPROVAL BY		2009/02/03	SCALE: 1:1
			UNIT: m.m
TEL:(02)86481727 FAX:(02)86482427			