



A Type

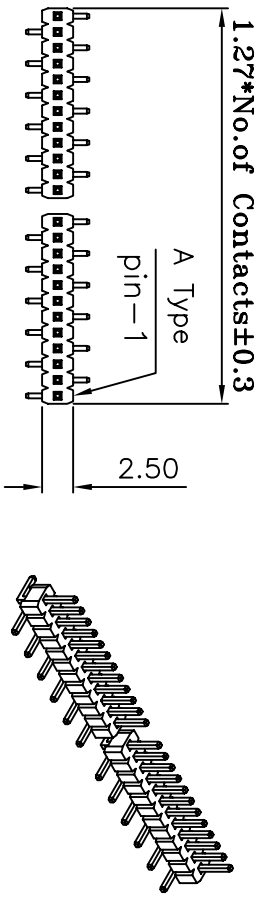


B Type

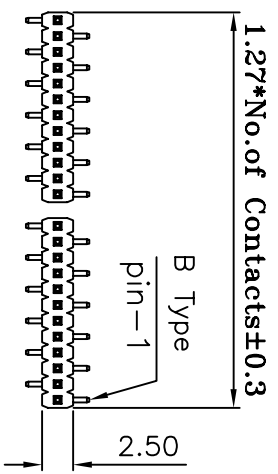

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester; UL 94V-0
 Finish: Tin, Gold Plated
 Standard: Nylon-6T


A Type

Recommended P.C. Board
 SMD Layout

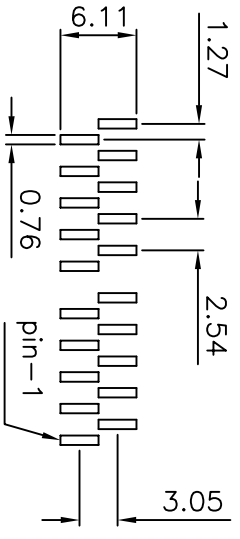

B Type

Recommended P.C. Board
 SMD Layout

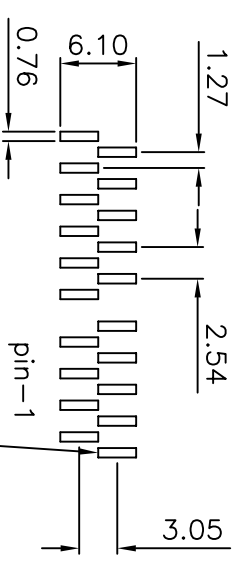

(RoHS Compliant)

H3 N 17 X - 1 XX DX BK X 000 B
 1 2 3 4 5 6 7 8

1. Insulator Material:

N = Nylon-6T

2. P = Phosphor Bronze

Blank=Brass

3. Per Row 03~50 pin

4. Tail Style:

DA = S.M.D A Type

5. Color: BK=Black

DB = S.M.D B Type

WH = White

6. Contact Plated:

C = Gold Flash

A = Gold 3u"

D = Gold 5u"

G = Gold 10u"

L = Gold 15u"

U = Gold 30u"

7. Special Options

8. Packing:

B = Tube

©H3N17-1XXDXBKX000-2007/02/27-C



CONN TOP
 COMPONENT INC.

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N17X-1XXDXBKX001B	5.10mm	3.00mm	2.70mm
H3N17X-1XXDXBKX002B	5.10mm	1.80mm	2.70mm

1:	H3N17-1XXBKX0
BOM 2:	QT-0.40X XXBN
3:	0

PART NO	H3N17X-1XXDXBKX000B	.X	.XX	.XXX
DRAWING NO	PHB-00069	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: PHB	
APPROVAL BY		2009/02/03	SCALE: 1:1	
			UNIT: m.m	

TEL: (02)86481727 FAX: (02)86482427