
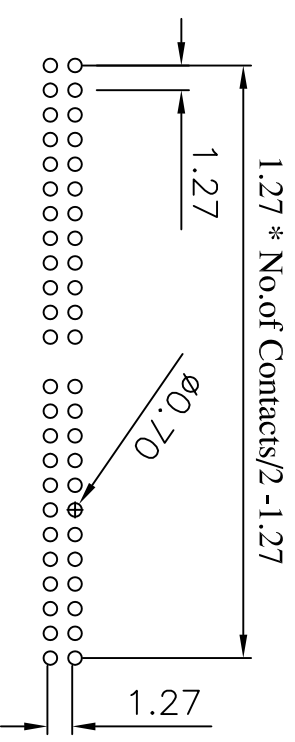
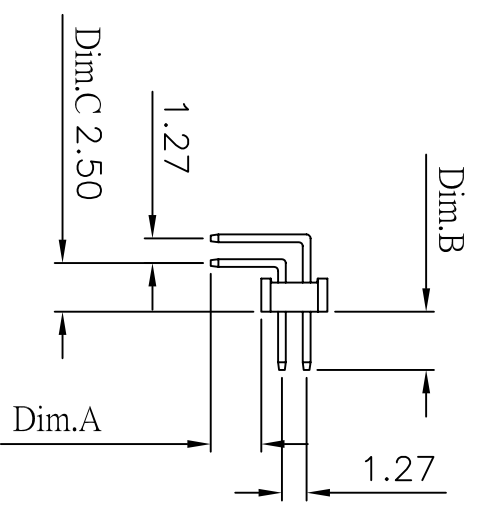


Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: -40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Finish: Tin, Gold Plated
Standard: Gold Flash all over
Standard: Nylon-6T

Recommended P.C. Board
 Hole Layout

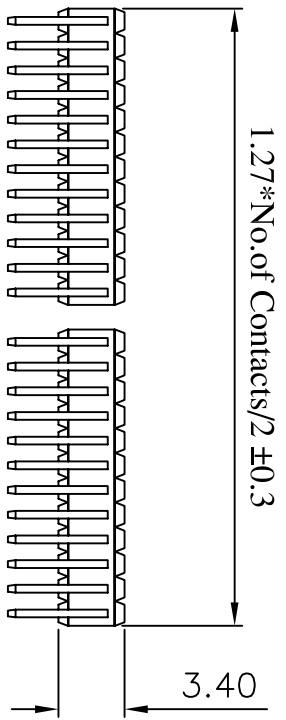

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N17X-2XXR0BKX0001X	2.60mm	3.00mm	2.50mm
H3N17X-2XXR0BKX0002X	2.60mm	1.80mm	2.50mm
H3N17X-2XXR0BKX0003X	1.50mm	3.00mm	2.50mm
H3N17X-2XXR0BKX0004X	1.50mm	1.80mm	2.50mm

(RoHS Compliant) H3 N 17 X - 2 XX R0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material:
N= Nylon-6T
- P= Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Toil Style:
R0= Right Angle
- Color: BK=Black
WH=White
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options:
A= PE Bag
B= Tube
D= Box
- Packng:

CONN TOP COMPONENT INC. TEL: (02)86481727 FAX: (02)86482427			
PART NO		H3N17X-2XXR0BKX000X	
1:	H3N17-2XXBKHO	DRAWING NO	PHB-00146
2:	QT-0.40X XXXBN	DRAWN BY	GARY
3:	0	EDITION:	C1
APPROVAL BY		SCALE:	1:1
		ITEM:	PHB
		UNIT:	m.m