
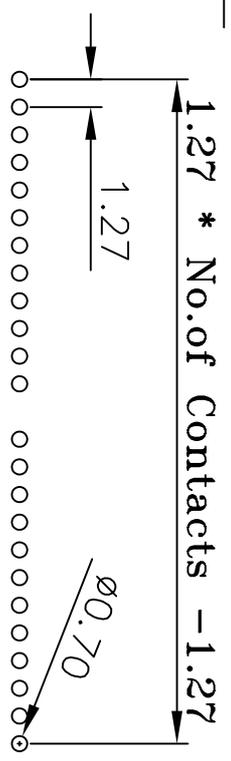
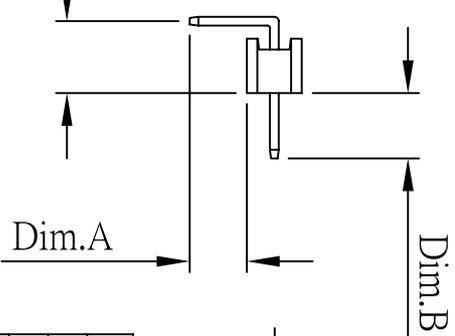


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

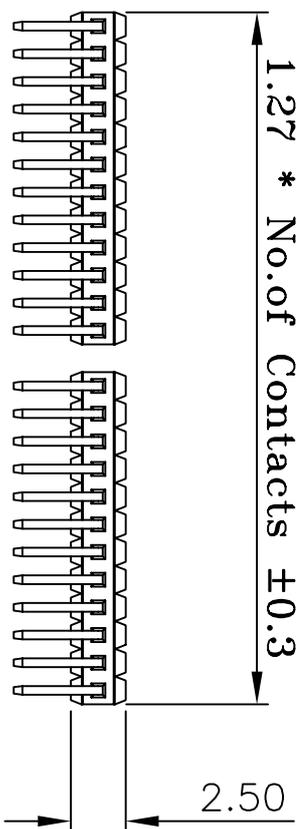

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N25X-1XXR0BKX001X	2.60mm	3.00mm	3.30mm
H3N25X-1XXR0BKX002X	2.60mm	1.80mm	3.30mm
H3N25X-1XXR0BKX003X	1.50mm	3.00mm	3.30mm
H3N25X-1XXR0BKX004X	1.50mm	1.80mm	3.30mm

(RoHS Compliant) H3 N 25 X - 1 XX R0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material:
N= Nylon-6T
- P= Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style:
R0= Right Angle
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options:
A= PE Bag
B= Tube
D= Box
- Color: BK=Black
WH=White



①:H3N25-1XXR0BKX000A-2008/03/14-C1
 ②:H3N25-1XXR0BKX000-2007/02/27-C
 ③:Dim.C 0.80-2007/02/27-C

1: H3N25-1XXBKH0
 2: QT-0.40X XXXBN
 3: 0

TEL: (02)86481727 FAX: (02)86482427

PART NO	H3N25X-1XXR0BKX000X	.X	.XX	.XXX
DRAWING NO	PHB-00118	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C2	ITEM: PHB	SCALE: 1:1
APPROVAL BY		2009/02/11	UNIT: m.m	