

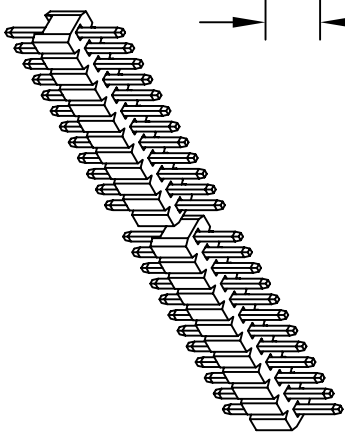


1.27*No.of Contacts±0.3

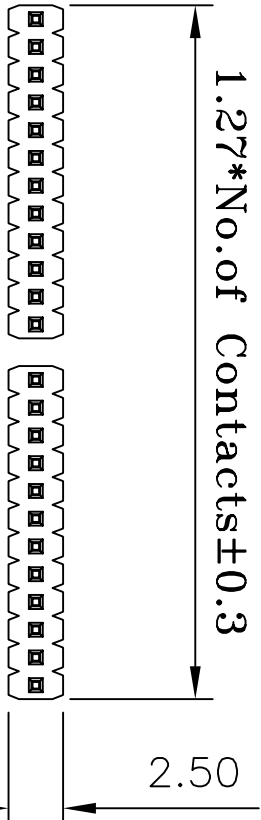


1.27*No.of Contacts-1.27

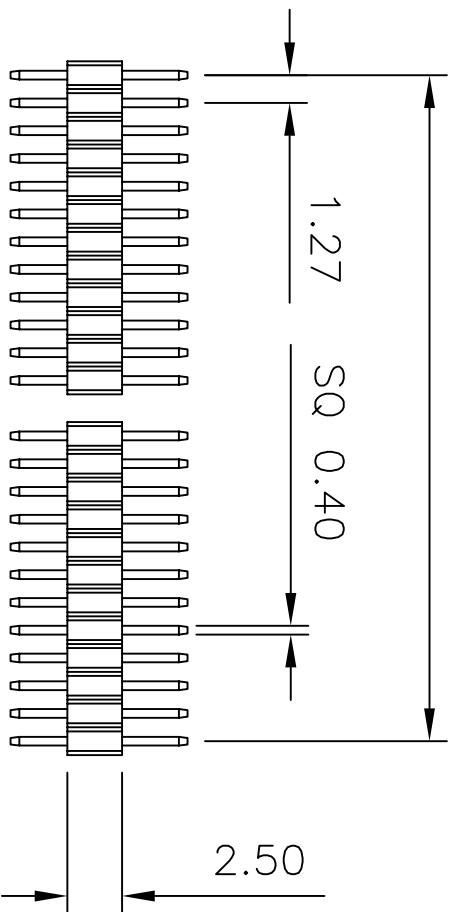


Dim.A

Dim.B

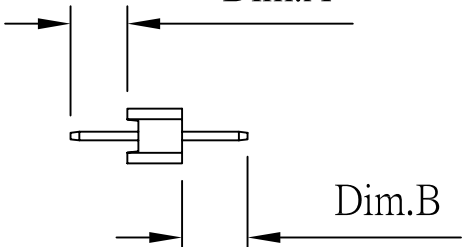

1.27*No.of Contacts-1.27

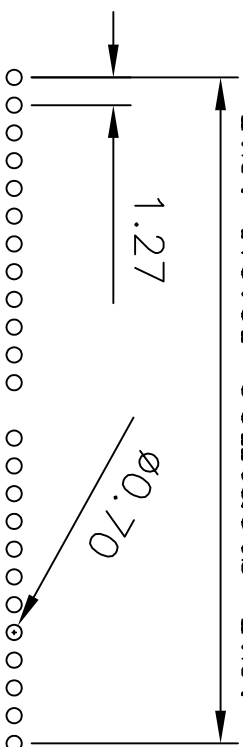

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester; UL 94V-0 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

(RoHS Compliant) H3 N 25 X - 1 XX S0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material: N= Nylon-6T
- P= Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style: S0= Straight
- Contact Plated: C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options: A= PE Bag
B= Tube
D= Box
- Packing: A= PE Bag
B= Tube
D= Box

©:H3N25-1XXXS0BKX000-2007/02/27-C



CONN TOP
COMPONENT INC.

Part No.	Dim.A ±0.20	Dim.B ±0.20
H3N25X-1XXXS0BKX001X	2.60mm	3.00mm
H3N25X-1XXXS0BKX002X	2.60mm	1.80mm
H3N25X-1XXXS0BKX003X	1.50mm	3.00mm
H3N25X-1XXXS0BKX004X	1.50mm	1.80mm

1:	H3N25-1XXXBKH0
2:	QT-0.40XXXXBN
3:	0

PART NO	H3N25X-1XXXS0BKX000X	.X	.XX	.XXX
DRAWING NO	PHB-00113	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: PHB	SCALE: 1:1
APPROVAL BY			UNIT: m.m	

TEL: (02)86481727 FAX: (02)86482427