
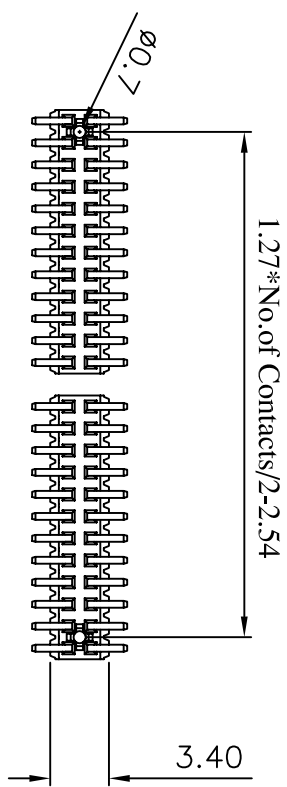
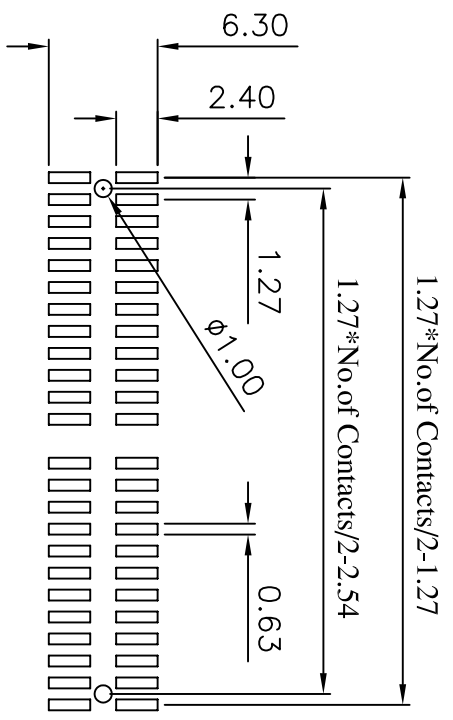
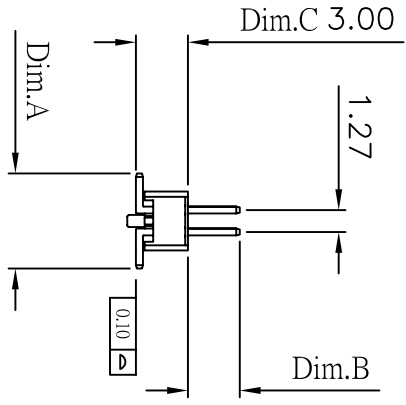


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester; UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

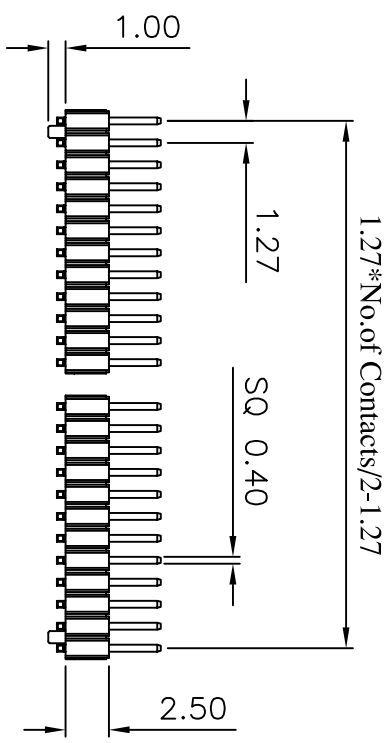

(RoHS Compliant) H3 N 25 X - 1 XX D1 BK X 000 B
 1 2 3 4 5 6 7 8

- Insulator Material: Nylon-6T
N = Nylon-6T
- P = Phosphor Bronze
Blank = Brass
- Per Row 02~50 pin
- Tail Style: D1 = SMD With Peg Type
- Color: BK = Black
WH = White
- Contact Plated: C = Gold Flash
A = Gold 3u"
D = Gold 5u"
G = Gold 10u"
L = Gold 15u"
U = Gold 30u"
- Special Options: B = Tube
- Packaging: B = Tube

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N25X-2XXD1BKX001B	5.50mm	3.00mm	3.00mm
H3N25X-2XXD1BKX002B	5.50mm	1.80mm	3.00mm

①:H3N25-2XXD1BKX000-2007/02/27-C			
CONN TOP COMPONENT INC.		PART NO	H3N25X-2XXD1BKX000B
1: H3N25-2XXBKHO	DRAWING NO	PHB-00062	EDITION: C1
2: QT-0.40X XXBN	DRAWN BY	GARY	2009/02/11
3: 0	APPROVAL BY		
TEL:(02)86481727 FAX:(02)86482427			
		X	.XX
		±0.3	±0.20
			±0.100
		ITEM: PHB	SCALE: 1:1
		UNIT: m.m	