
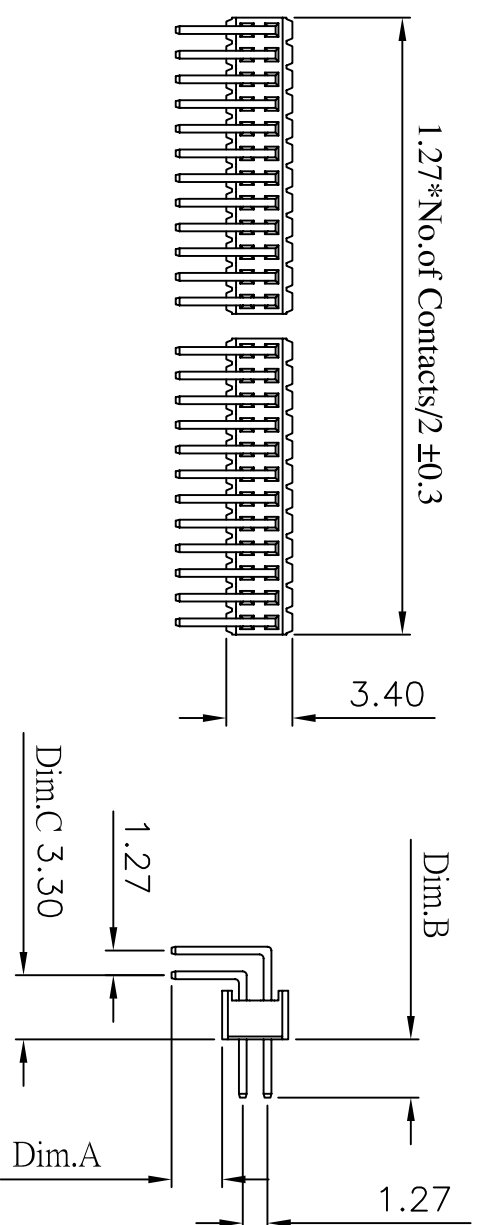


Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester; UL 94V-0  
 Standard: Nylon-6T  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

Recommended P.C. Board  
Hole Layout

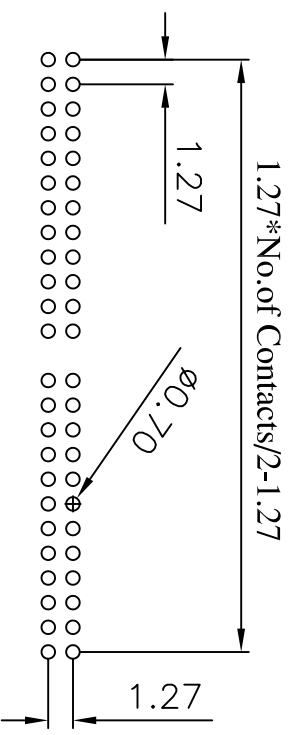

(RoHS Compliant) H3 N 25 X - 2 XX R0 BK X 000 X  
 1 2 3 4 5 6 7 8

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N25X-2XXR0BKX001X	2.60mm	3.00mm	3.30mm
H3N25X-2XXR0BKX002X	2.60mm	1.80mm	3.30mm
H3N25X-2XXR0BKX003X	1.50mm	3.00mm	3.30mm
H3N25X-2XXR0BKX004X	1.50mm	1.80mm	3.30mm

- Insulator Material:  
N= Nylon-6T
- P= Phosphor Bronze  
Blank=Brass
- Per Row 02~50 pin

- Tail Style:  
R0= Right Angle
- Color: BK=Black  
WH=White

- Contact Plated:  
C=Gold Flash  
A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"

- Special Options  
A= PE Bag  
B= Tube  
D= Box



CONN TOP  
COMPONENT INC.

1:	H3N25-2XXBKHO
2:	QT-0.40X XXXBN
3:	0

PART NO	H3N25X-2XXR0BKX000X	.X	.XX	.XXX
DRAWING NO	PHB-00022	±0.3	±0.20	±0.100
DRAWN BY	GARY			
EDITION:	C1			
SCALE:	2009/02/11			
APPROVAL BY				
ITEM:	PHB			
SCALE:	1:1			
UNIT:	m.m			

TEL:(02)86481727 FAX:(02)86482427