



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

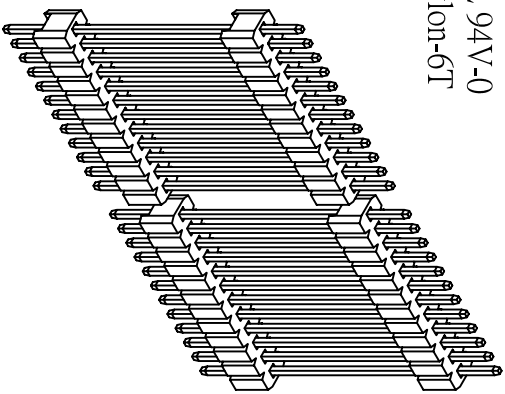

Recommended P.C. Board
 Hole Layout

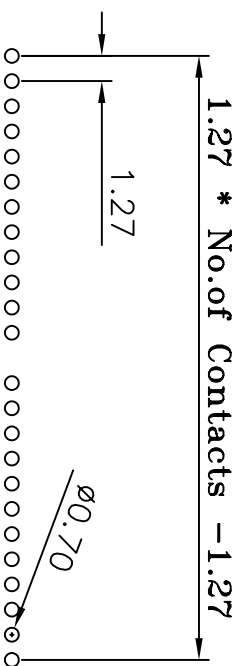

(RoHS Compliant)

H3 N 25 X - 1 XX S0 BK X D07 D
 1 2 3 4 5 6 7 8

- Insulator Material:
N= Nylon-6T
- P= Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style:
S0= Straight
- Color: BK=Black
WH=White
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options
D= Box
- Packing:
D= Box



CONN TOP
COMPONENT INC.

PART NO

H3N25X-1XXS0BKXD07D

.X
±0.3

.XX
±0.20

.XXX
±0.100

1: H3N25-1XXS0BKHD0

DRAWING NO

PHB-00226

EDITION: C

ITEM: PHB

BOM 2: QT-0.40X23.00BN

DRAWN BY

GARY

2009/03/30

SCALE: 1:1

3: 0

TEL: (02)86481727 FAX: (02)86482427

APPROVAL BY

UNIT: m.m