

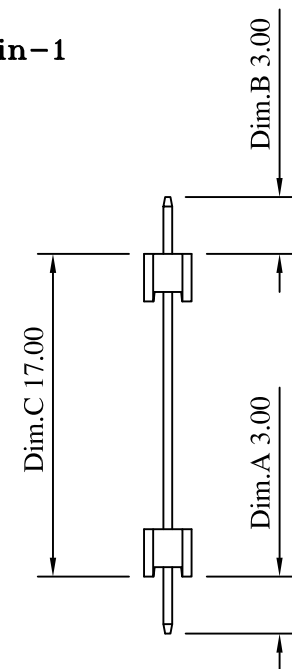


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: High Temperature
 Plastic,UL 94V-0
 Standard:Gold Flash all over

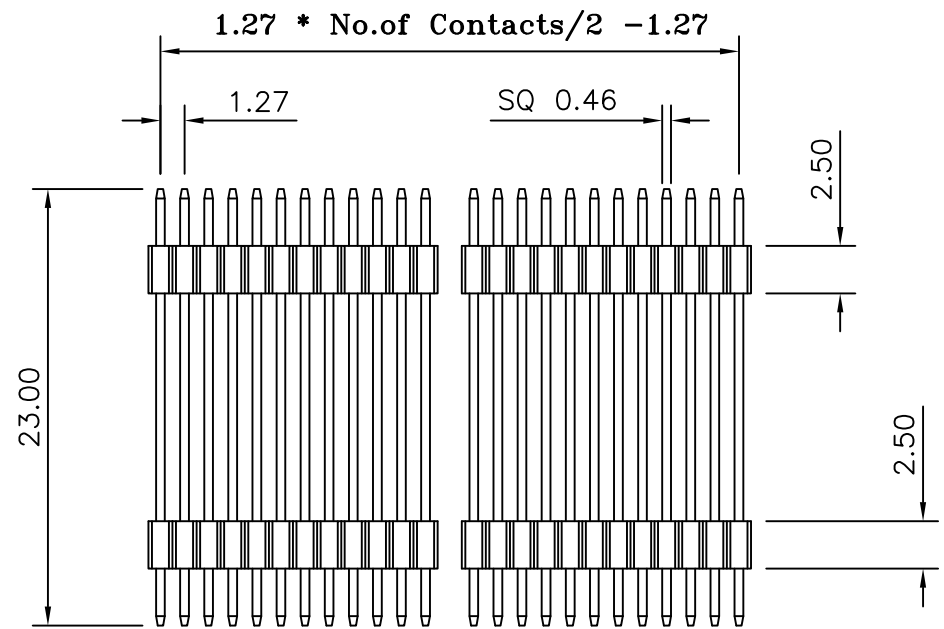

Recommended P.C. Board Hole Layout

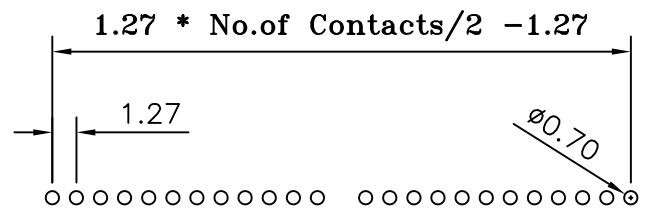

(RoHS Compliant) H3 N 25 A X - 1 XX S0 BK X D03 X
 1 2 3 4 5 6 7 8

- | | | | |
|---------------------------------------|--------------------------------|---|--------------------|
| 1. Insulator Material:
N= Nylon-6T | 4. Tail Style:
S0= Straght | 6. Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u" | 7. Special Options |
| 2. P= Phosphor Bronze
Blank=Brass | 5. Color: BK=Black
WH=White | 8. Packing:
A= PE Bag
D= Box | |
| 3. Per Row: 02 ~ 40 pin | | | |

CONN TOP COMPONENT INC.
 No.1, Lane 56, Ta-An Street, Hsi-Chih City, Taipei Hsien, Taiwan,
 Tel:886-2-86481727 Fax:886-2-86482427
 Homepage:http://www.conntop.com.tw

PART NO	H3N25AX-1XXS0BKXD03X	.X ±0.3	.XX ±0.20	.XXX ±0.100
DRAWING NO	PHB-00233	EDITION: C		ITEM: PHB
DRAWN BY	GARY	2009/05/13		SCALE: 1:1
APPROVAL BY	Peter pan	2009/05/13		UNIT: m.m