

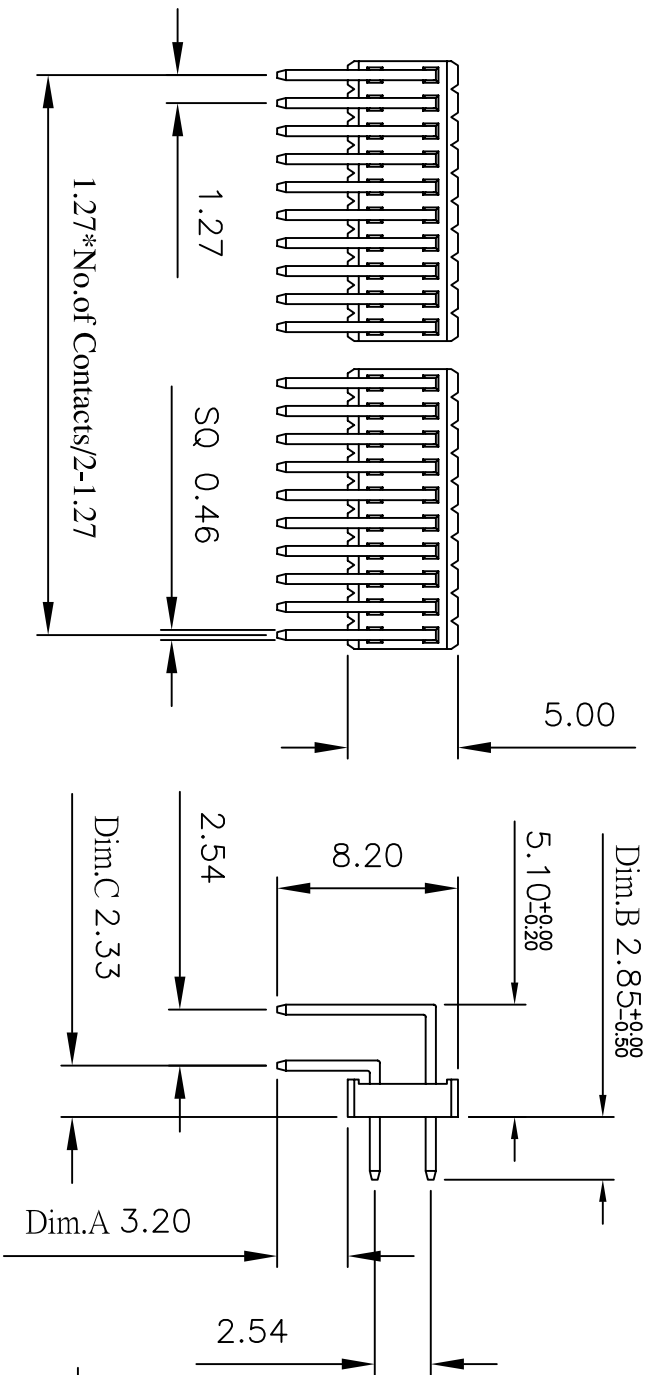
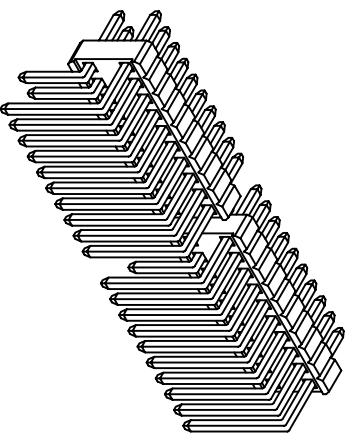


1.27\*No.of Contacts/2 ±0.3

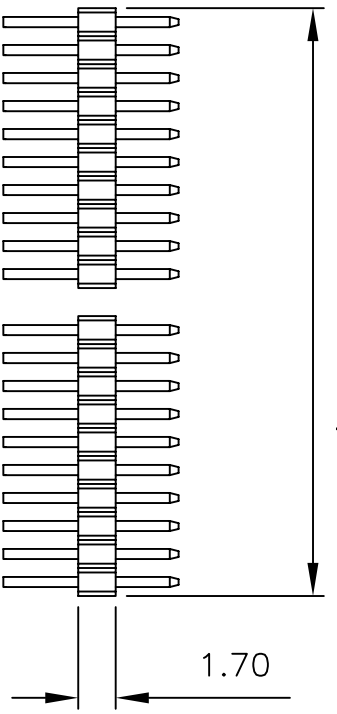

Recommended P.C. Board  
Hole Layout

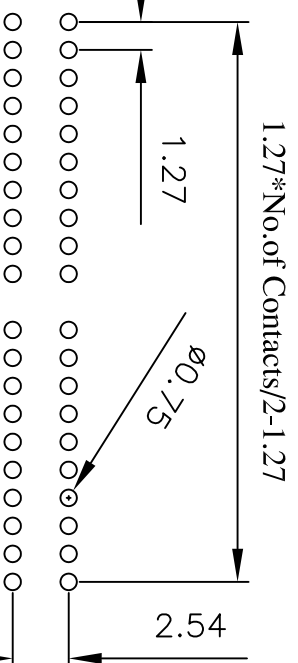

Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

(RoHS Compliant)

H4 N 17 A X - 2 XX R0 BK X 001 X  
 1 2 3 4 5 6 7 8

- Insulator Material:  
N= Nylon-6T
- P= Phosphor Bronze  
Blank=Brass
- Per Row 02~50 pin
- Tail Style:  
R0= Right Angle
- Color: BK=Black  
WH=White
- Contact Plated:  
C=Gold Flash  
A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"
- Special Options  
A= PE Bag  
D= Box
- Packing:



CONN TOP  
COMPONENT INC.

①:H4N17A-2XXR0BKX001-2007/05/18-C

1:	H4N25A-2XXBKH0
BOM 2:	QT-0.46X9.20BN
3:	QT-0.46X14.30BN
TEL:	(02)86481727 FAX: (02)86482427

PART NO	H4N17AX-2XXR0BKX001X	.X	.XX	.XXX
DRAWING NO	PHC-00016	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: PHC	
APPROVAL BY		2009/02/13	SCALE: 1:1	
			UNIT: m.m	