



Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0 Standard: Nylon-6T  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

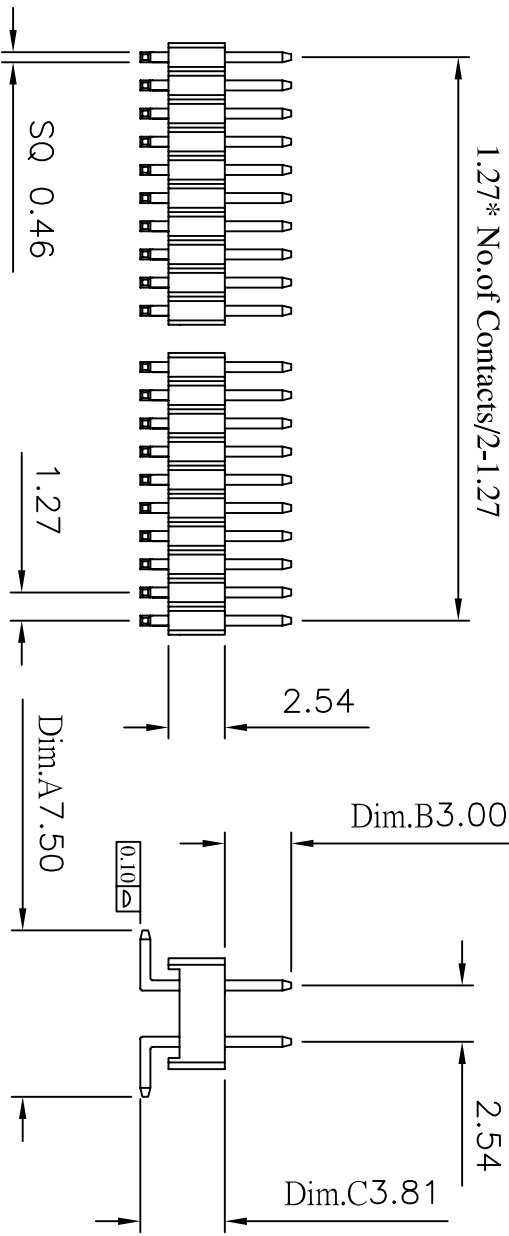

Recommended P.C. Board  
 SMD Layout

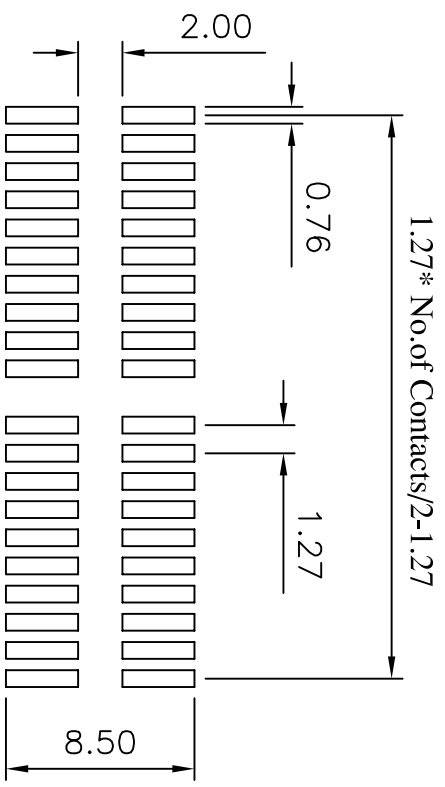

(RoHS Compliant) H4 N 25 A X - 2 XX D0 BK X 000 B  
 1 1 2 3 4 5 6 7 8

- Insulator Material: Nylon-6T
- P = Phosphor Bronze  
Blank=Brass
- Per Row 02~50 pin
- Tail Style: DO = S.M.D No Peg Type
- Color: BK=Black  
WH=White
- Contact Plated: C=Gold Flash  
A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"
- Special Options: B = Tube
- Pecking: B = Tube

CONN TOP COMPONENT INC. ①:H4N25A-2XXDDBKX000-2007/03/21-C		PART NO		H4N25AX-2XXDDBKX000B		.X ±0.3		.XXX ±0.100	
BOM 1:		H4N25A-2XXBKH0		DRAWING NO		PHC-00003		EDITION: C1	
BOM 2:		QT-0.46X8.90BN		DRAWN BY		GARY		2009/02/13	
BOM 3:		0		APPROVAL BY				SCALE: 1:1	
TEL: (02)86481727		FAX: (02)86482427						UNIT: m.m	