


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

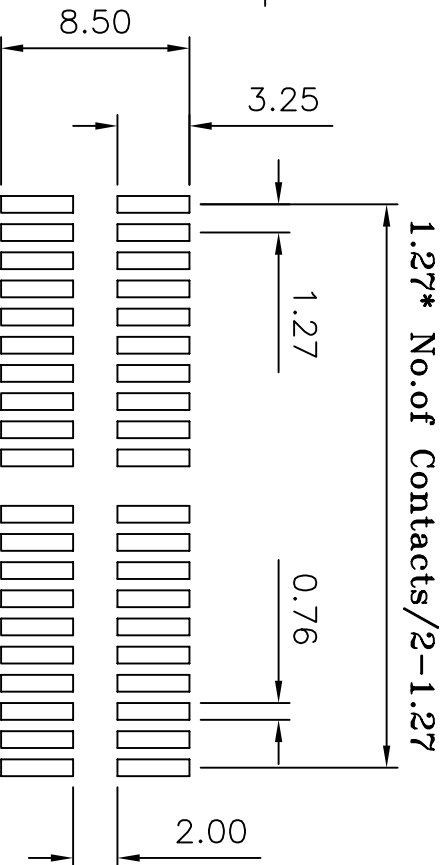

(RoHS Compliant)

H4 N 25 A - 2 XX D0 BK X D01 X
 1 2 3 4 5 6 7

- Insulator Material: N = Nylon-6T
- Per Row 02~50 pin
- Tall Style: D0 = S.M.D No Peg Type
D1 = S.M.D With Peg Type
Color: BK=Black
WH=White
- Contact Plated: T=Matte Tin over Nickel
W=Matte Tin over Nickel
Y=Brighte Tin over Nickel
C=Gold Flash
F=Gold Flash,Matte Tin 100u"
A=Gold 3u"
B=Gold 3u",Matte Tin 100u"
- Special Options: D=Gold 5u"
E=Gold 5u",Matte Tin 100u"
G=Gold 10u"
J=Gold 10u",Matte Tin 100u"
L=Gold 15u"
M=Gold 15u",Matte Tin 100u"
U=Gold 30u"
V=Gold 30u",Matte Tin 100u"
- Packaging: B = Tube
D = Box



CONN TOP
 COMPONENT INC.

PART NO H4N25A-2XXXBKHD01X

.X .XX .XXX
 ±0.3 ±0.20 ±0.100

1: H4N25A-2XXXBKHD0
 2: QT-0.46X21.00BN
 3: 0

DRAWING NO
 DRAWN BY

PHC-00023
 GARY

EDITION: C
 2008/04/15

ITEM: PHC
 SCALE: 1:1

TEL:(02)86481727 FAX:(02)86482427

APPROVAL BY

UNIT: m.m