


Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0 Standard: Nylon-6T  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

Recommended P.C. Board Hole Layout

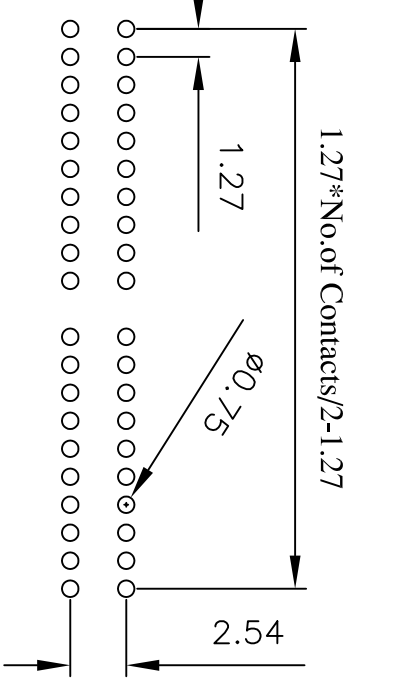

(RoHS Compliant) H4 N 25 AQ X - 2 XX R0 BK X 001 X  
 1 2 3 4 5 6 7 8

- Insulator Material:  
N= Nylon-6T
- P= Phosphor Bronze  
Blank=Brass
- Per Row 02~50 pin
- Tail Style:  
R0= Right Angle
- Contact Plated:  
C=Gold Flash  
A=Gold 5u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"
- Special Options  
A = PE Bog  
D = Box
- Peckings:  
A = PE Bog  
D = Box

CONN TOP COMPONENT INC.

1:	H4N25A-2XXXBKHX0
2:	QTP-0.46X0.535X10.65N
3:	QTP-0.46X0.535X15.7BN

PART NO	H4N25AQX-2XXXR0BKX001X	.X	.XX	.XXX
DRAWING NO	PHC-00008	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	SCALE: 1:1	ITEM: PHC
APPROVAL BY				UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427