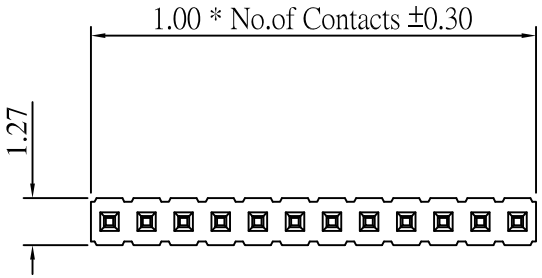

Recommended P.C. Board
Hole Layout

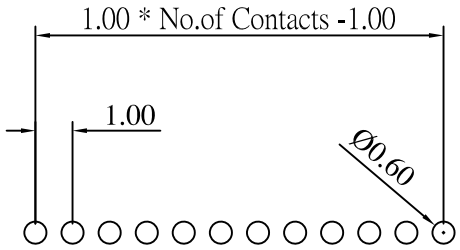

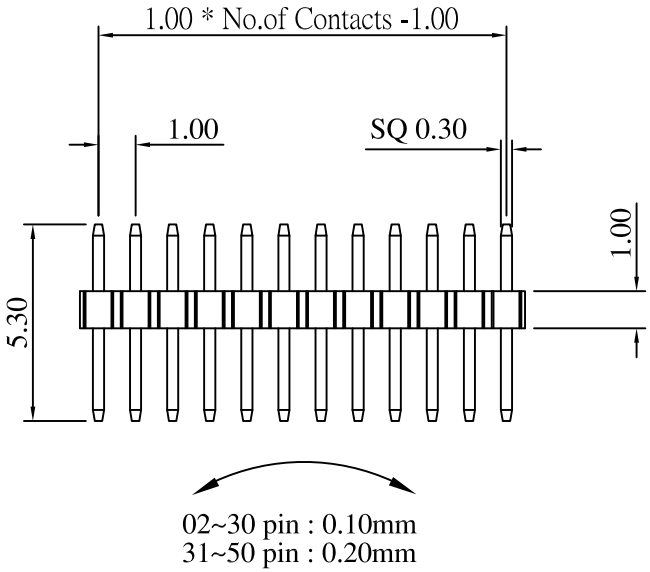



Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
Insulator Resistance: 1000 Megohms min
Contact Resistance: **20m ohms max**
Dielectric Withstanding:300 V AC
Operating Temperature: - 40˚ ~ +125˚ C
Max Processing Temp: 230˚ C for 60 seconds
Max Processing Temp: 260˚ C for 10 seconds
Contact Material: Copper Alloy
Standard: Phosphor Bronze
Insulator Material: Polyester,UL 94V-0
Standard: LCP
Finish: Standard: Gold Flash all over

Enable 3D View

(RoHS Compliant)
(Halogen-Free)

H5 L 10 - 1 XX S0 BK X 000 X
1 2 3 4 5 6 7

1. Insulator Material:
L= L.C.P
2. Per Row 02~50 pin
3. Taill Style:
S0=Straight
4. Color: BK=Black
WH=White

5. Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"

6. Special Options
7. Packing:
B= Tube
D= Box

CONN TOP COMPONENT INC.
No.1, Lane 56, Ta-An Street, Hsi-Chih City,
Taipei Hsien, Taiwan,
Tel:886-2-86481727 Fax:886-2-86482427
Homepage:http//www.conntop.com.tw

PART NO	H5L10-1XXS0BKX000X		.X ±0.3	.XX ±0.20	.XXX ±0.100
DRAWING NO	H5-00014	EDITION: C		ITEM: H5	
DRAWN BY	JARRY	2021/09/01		SCALE: 1:1	
APPROVAL BY	Peter pan	2021/09/01		UNIT: m.m	