


(RoHS Compliant)
(Halogen-Free)

H6 L 10 - 2 XX D1 BK X 000 B
1 2 3 4 5 6 7

- Insulator Material: LN= L.C.P
- Per Row 02~50 pin
- Taill Style: D1= S.M.D With Peg Type
- Color: BK=Black, WH=White
- Contact Plated: A=Gold 3u", D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Special Options: T=Matte Tin over Nickel, W=Matte Tin over Nickel 150u", Y=Bright Tin over Nickel, C=Gold Flash
- Packaging: B= Tube

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Dielectric Withstanding: 300 V AC
 Contact Resistance: 20m Min.
 Operating Temperature: - 40 ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: LCP

Recommended P.C. Board
SMD Layout

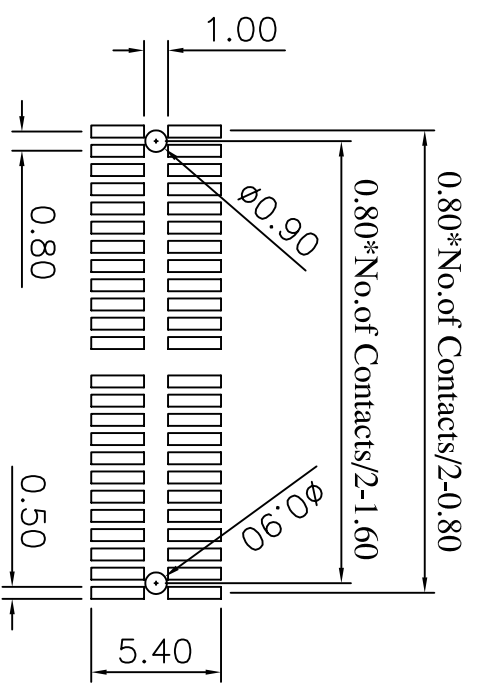

		PART NO		H6L10-2XXD1BKX000B		.X	
1: H6L10-2XXBKH1 2: QT-0.30X5.80BN 3:		DRAWING NO		H5-00016		±0.30	
TEL: (02)86481727 FAX: (02)86482427		DRAWN BY		GARY		±0.20	
		APPROVAL BY				±0.100	
				EDITION: 2008/12/04		ITEM: H6	
						SCALE: 1:1	
						UNIT: m.m	