

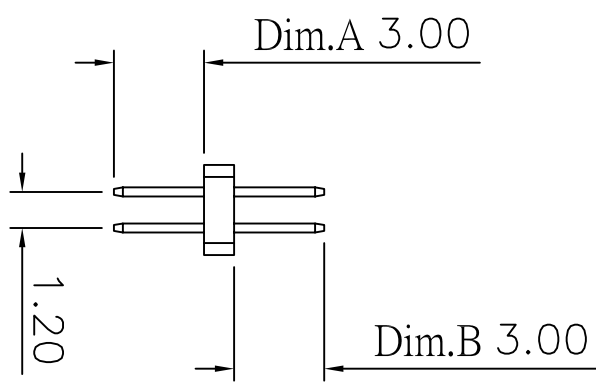


Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Dielectric Withstanding: 300 V AC
 Contact Resistance: 20m Min.
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0

Standard: LCP

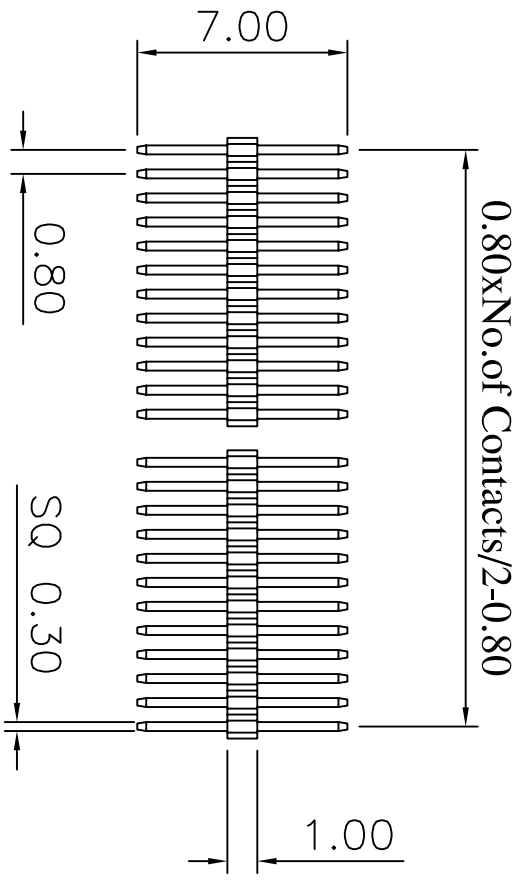

Recommended P.C. Board
 Hole Layout

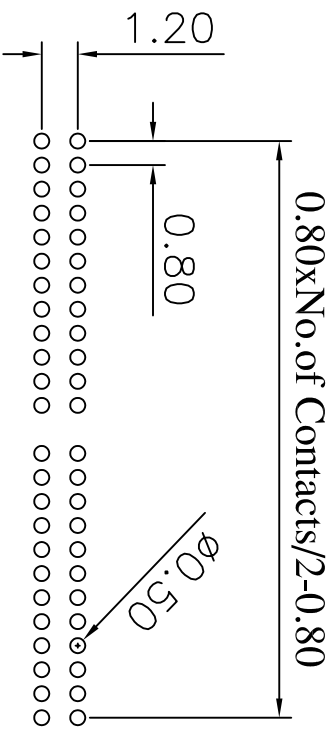

(RoHS Compliant) H6 L 10 - 2 XX S0 BK X 000 B
 (Halogen-Free) 1 2 3 4 5 6 7

- Insulator Material: 5. Contact Plated: A=Gold 3u" LN= L.C.P T=Matte Tin over Nickel D=Gold 5u"
- Per Row 02~50 pin W=Matte Tin over Nickel 150u" G=Gold 10u"
- Taill Style: SO=Straitght Y=Bright Tin over Nickel L=Gold 15u"
- Color: BK=Black C=Gold Flash U=Gold 30u"



CONN TOP
 COMPONENT INC.

PART NO	H6L10-2XXS0BKX000B	.X	.XX	.XXX
DRAWING NO	H5-00017	±0.30	±0.20	±0.100
DRAWN BY	GARY	EDITION: C	ITEM: H6	
APPROVAL BY		2008/12/04	SCALE: 1:1	
			UNIT: m.m	

1: H6L10-2XXBKH0
 2: QT-0.30X7.00BN
 3:
 TEL:(02)86481727 FAX:(02)86482427