

(RoHS Compliant)  
(Halogen-Free)

H6 L 14 - 2 XX D0 BK X 000 B  
1 2 3 4 5 6 7

1. Insulator Material:  
LN=L,C,P  
2. Per Row 02-50 pin  
3. Taill Style:  
D0= S.M,D No Peg Type  
4. Color: BK=Black  
WH=White


5. Contact Plated:  
T=Matte Tin over Nickel  
W=Matte Tin over Nickel 150u"  
Y=Bright Tin over Nickel  
C=Gold Flash

- A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"

6. Special Options  
7. Packing:  
B= Tube

Current Rating: 1 Amps  
 Insulator Resistance: 1000 Megohms min  
 Dielectric Withstanding: 300 V AC  
 Contact Resistance: 20m Min.  
 Operating Temperature: - 40 ~ +125° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Standard: LCP

**Recommended P.C. Board  
SMD Layout**

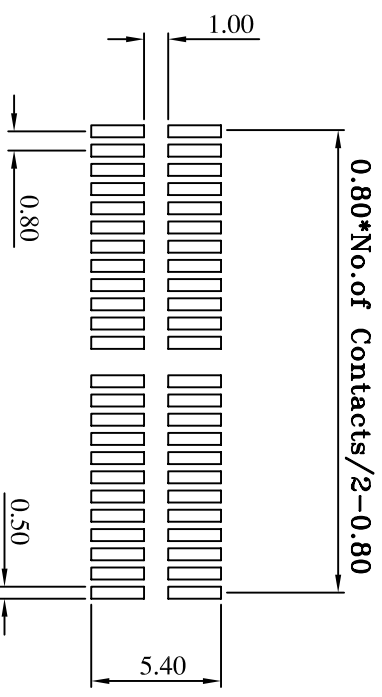

		PART NO	H6L14-2XXD0BKX000B	X ±0.30	XX ±0.20	XXX ±0.100
1:	H6L14-2XXBKH0	DRAWING NO	H5-00022	EDITION:	C	ITEM: H6
2:	QT-0.30X5.00BN	DRAWN BY	GARY	2008/12/04	SCALE: 1:1	
3:		APPROVAL BY				UNIT: m.m
TEL: (02)86481727 FAX: (02)86482427						