

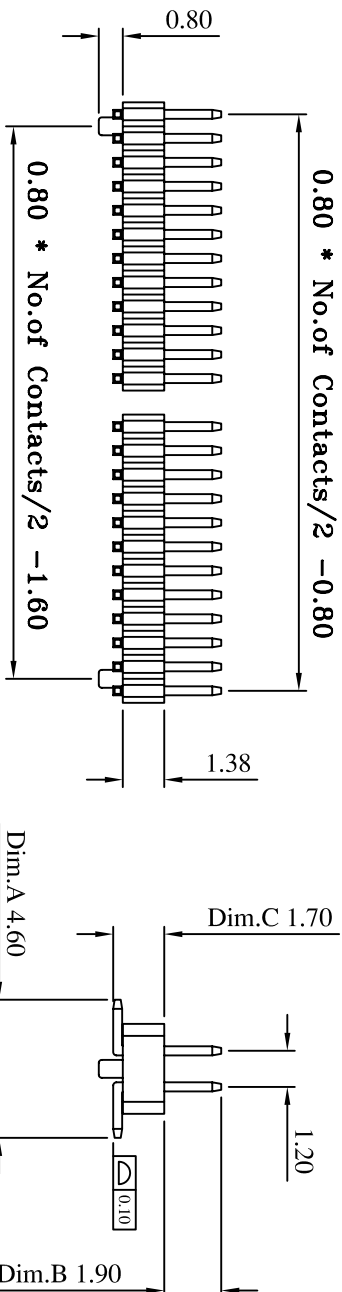


Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: 300 V AC
Contact Resistance: 20 m ohms max
Operating Temperature: - 40° ~ +125° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Standard: LCP

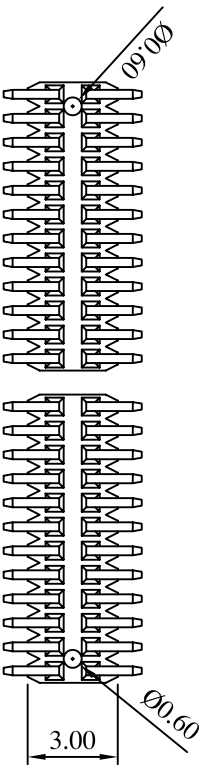

**Recommended P.C. Board
 SMD Layout**

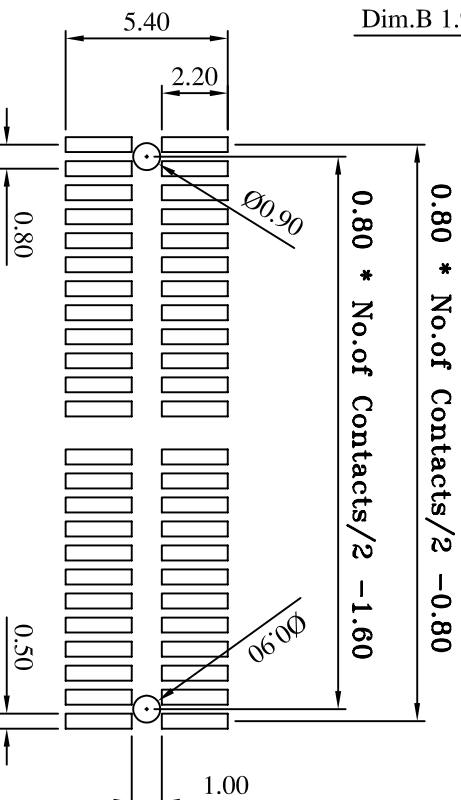

(RoHS Compliant)
 (Halogen-Free)

H6 L 14 - 2 XX D1 BK X 000 B
1 2 3 4 5 6 7

- 1. Insulator Material: L=L.C.P
- 2. Per Row 02-50 pin
- 3. Tail Style: D1=S.M.D With Peg Type
- 4. Color: BK=Black
- 5. Contact Plated: T=Matte Tin over Nickel
- 6. Special Options: A=Gold 3u"
- 7. Packing: B=Tube
- W=Matte Tin over Nickel 150u"
- Y=Bright Tin over Nickel
- C=Gold Flash
- G=Gold 10u"
- L=Gold 15u"
- U=Gold 30u"



**CONN TOP
 COMPONENT INC.**

PART NO H6L14-2XXD1BKX000B

**X .XX .XXX
 ±0.3 ±0.20 ±0.100**

1:	H6L14-2XXBKH1	DRAWING NO	H5-00027	EDITION:	C	ITEM:	H6
BOM 2:	QT-0.30X5.00BN	DRAWN BY	GARY	2009/06/30	SCALE:	1:1	
3:		APPROVAL BY					UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427