



2.0 X (No. of Contacts/2-1)

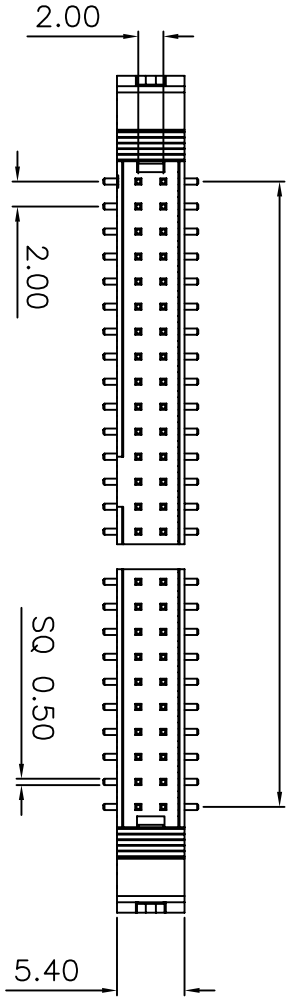


2.0 X (No. of Contacts/2)+6.25

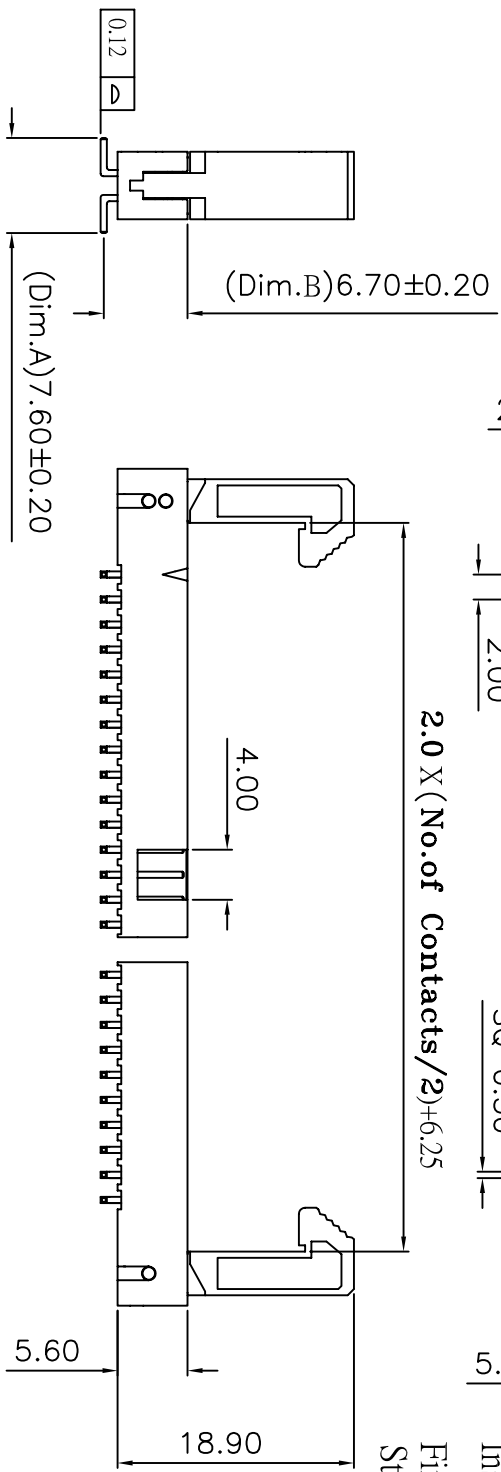


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: 500 V AC
 Contact Resistance: 20m ohms max.
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester; UL 94V-0
 Finish: Tin, Gold Plated
 Standard: Nylon-6T

2.0 X (No. of Contacts/2) + 14.9 ± 0.20

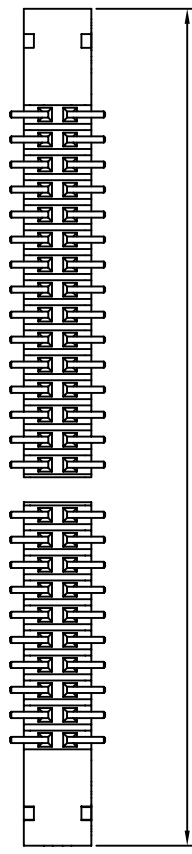

Recommended P.C. Board
 SMD Layout

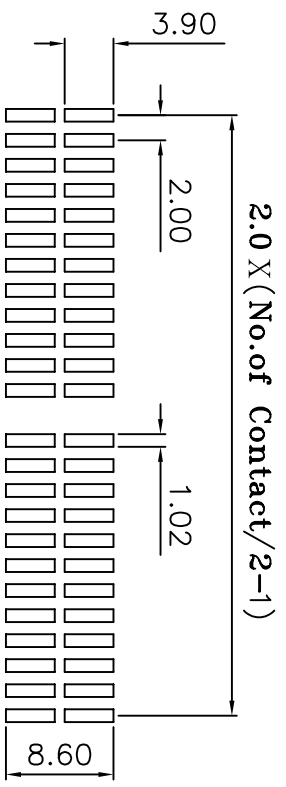

(RoHS Compliant) LH2N X - XX DL BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material: N= Nylon-6T
- Phosphor Bronze Blank: Brass
- Per ROW: 08 ~ 50pin
- Tail Style: DL= S.M.D Long Latch
- Color: BK=Black
- Contact Plated: T=Matte Tin over Nickel, W=Matte Tin over Nickel, Y=Bright Tin over Nickel, C=Gold Flash, F=Gold Flash, Matte Tin 100u", A=Gold 3u", B=Gold 3u", Matte Tin 100u"
- Special Options: D=Gold 5u", E=Gold 5u", Matte Tin 100u", G=Gold 10u", J=Gold 10u", Matte Tin 100u", L=Gold 15u", M=Gold 15u", Matte Tin 100u", U=Gold 30u", V=Gold 30u", Matte Tin 100u"
- Packaging: B = Tube, C = Tray, N = Top & Reel

		① LH2NX-XXDLBKX000-2007/04/17-C	
PART NO	LH2NX-XXDLBKX000X	.X	.XXX
DRAWING NO	LH-20-00009	±0.3	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: LH-20
APPROVAL BY		2008/04/30	SCALE: 1:1
		UNIT: m.m	

TEL: (02)86481727 FAX: (02)86482427