



Current Rating: 2 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: 500 V AC
Contact Resistance: 20m ohms max.
Operating Temperature: -40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
Standard: Nylon-6T
Finish: Tin, Gold Plated
Standard: Gold Flash all over

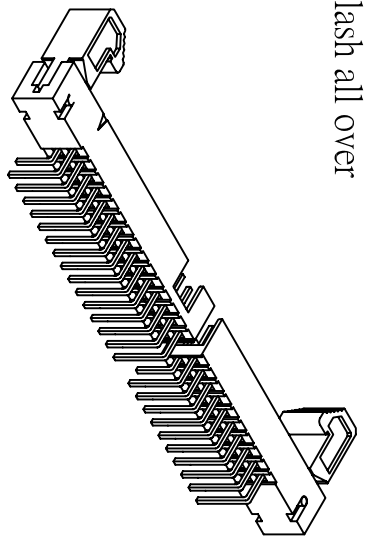

Recommended P.C. Board
 Hole Layout

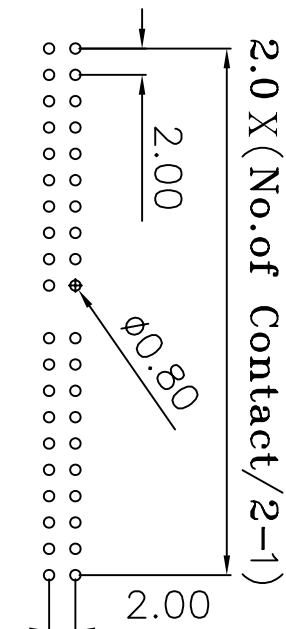

- (RoHS Compliant)
- | | | | |
|---------------------------|-----------------------------|-------------------------------|-----------------------------|
| LH2N X - XX RS BK X 000 C | 1. Insulator Material: | T=Matte Tin over Nickel | E=Gold 5u",Matte Tin 100u" |
| 1 2 3 4 5 6 7 8 | N= Nylon-6T | W=Matte Tin over Nickel 150u" | G=Gold 10u" |
| | 2. A= Phosphor Bronze | Y=Bright Tin over Nickel | J=Gold 10u",Matte Tin 100u" |
| | Blank:=Brass | C=Gold Flash | L=Gold 15u" |
| | 3. Per ROW: 08 ~ 50pin | F=Gold Flash,Matte Tin 100u" | M=Gold 15u",Matte Tin 100u" |
| | 4. Tail Style: | A=Gold 3u" | U=Gold 30u" |
| | RS= Right Angle Short Latch | B=Gold 3u",Matte Tin 100u" | V=Gold 30u",Matte Tin 100u" |
| | 5. Color: BK=Black | D=Gold 5u" | |
| | 6. Contact Plated: | | 7. Special Options |
| | | | 8. Packaging: C= Tray |

CONN TOP COMPONENT INC. TEL: (02)86481727 FAX: (02)86482427		◎: LH2NX-XXRSBKX000-2007/04/19-C	
BOM 1: LH2N-XXBRK0 2: LH2N-BKES 3: QT-A-50X11.00BN 4: QT-A-50X15.00BN		PART NO LH2NX-XXRSBKX000C	X .XX .XXX ±0.3 ±0.20 ±0.100
DRAWING NO LH-20-00002	DRAWN BY GARY	EDITION: C1	ITEM: LH-20
APPROVAL BY	SCALE: 1:1	UNT: m.m	