


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: 500 V AC
 Contact Resistance: 20m ohms max.
 Operating Temperature: -40 ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Recommended P.C. Board
 Hole Layout

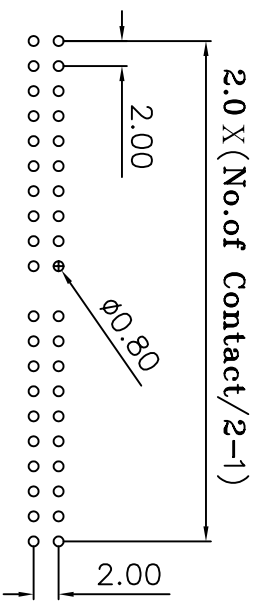

- (RoHS Compliant) LH2 N X - XX SL BK X 000 C
1. Insulator Material:
 N= Nylon-6T
 A= Phosphor Bronze
 Blank:=Brass
2. Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u"
 B=Gold 3u",Matte Tin 100u"
 D=Gold 5u"
3. Per ROW: 08 ~ 50pin
 Tail Style:
 SL= Straight Long Latch
4. Color: BK=Black
6. Contact Plated:
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
7. Special Options
 Packaging: C= Tray

①:LH2NX-XXSLBKX000-2007/04/19-C

1:	LH2N-XXBKH0	CONN TOP COMPONENT INC.
2:	QT-0.50X8.20BN	
3:	LH2N-BKEL	

TEL:(02)86481727 FAX:(02)86482427

PART NO	LH2NX-XXSLBKX000C	.X	.XX	.XXX
DRAWING NO	LH-20-00010	±0.3	±0.20	±0.100
DRAWN BY	GARY			
EDITION:	C1			
SCALE:	1:1			
APPROVAL BY				
ITEM:	LH-20			
UNIT:	m.m			