



Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: 500 V AC
 Contact Resistance: 20m ohms max.
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

2.0 X (No. of Contacts / 2) + 14.9 ± 0.20

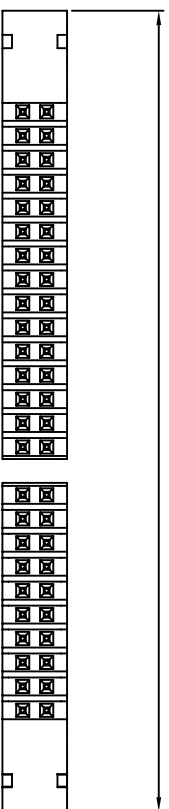

Recommended P.C. Board
 Hole Layout
 2.0 X (No. of Contact / 2 - 1)

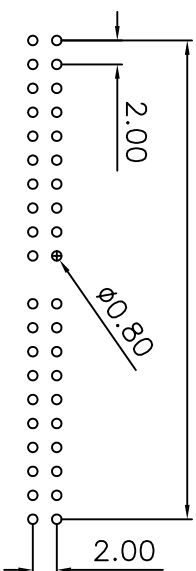

(RoHS Compliant)

LH2N X - XX SS BK X 000 C
 1 2 3 4 5 6 7 8

1. Insulator Material:

N= Nylon-6T

2. A= Phosphor Bronze

Blank:=Brass

3. Per ROW: 08 ~ 50pin

4. Tail Style:

SS= Straight Short Latch

5. Color: BK=Black

6. Contact Plated:

T=Matte Tin over Nickel

W=Matte Tin over Nickel 150u"

Y=Bright Tin over Nickel

C=Gold Flash

F=Gold Flash, Matte Tin 100u"

A=Gold 3u"

B=Gold 3u", Matte Tin 100u"

D=Gold 5u"

E=Gold 5u", Matte Tin 100u"

G=Gold 10u"

J=Gold 10u", Matte Tin 100u"

L=Gold 15u"

M=Gold 15u", Matte Tin 100u"

U=Gold 30u"

V=Gold 30u", Matte Tin 100u"

7. Special Options

8. Packaging: C= Tray

①: LH2NX-XXXXSSBKX000-2007/04/19-C



CONN TOP
COMPONENT INC.

BOM 1: LH2N-XXBKHO

2: OT-0.50X8.20BN

3: LH2N-BKES

TEL:(02)86481727 FAX:(02)86482427

PART NO LH2NX-XXXXSSBKX000C

.X .XX .XXX
±0.3 ±0.20 ±0.100

DRAWING NO LH-20-00001

EDITION: C1

DRAWN BY GARY

SCALE: 1:1

APPROVAL BY

UNIT: m.m