


(RoHS Compliant)
(Halogen-Free)

P1 L 50 - 2 20 SK BK X 008 B
1 2 3 4 5 6 7

- Standard : L=L.C.P
- Circuits : 40 pin
- Trail Style : SK= Straight Kink
- Color : BK=Black
- Contact Plated: T=Mate Tin over Nickel, W=Mate Tin over Nickel, Y=Bright Tin over Nickel, C=Gold Flash, F=Gold Flash,Mate Tin 100u", A=Gold 3u", B=Gold 3u",Mate Tin 100u"
- Special Options: D=Gold 5u", E=Gold 5u",Mate Tin 100u", G=Gold 10u", J=Gold 10u",Mate Tin 100u", L=Gold 15u", M=Gold 15u",Mate Tin 100u", U=Gold 30u", V=Gold 30u",Mate Tin 100u"
- Packing: B= Tube

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester,UL 94V-0
 Standard: L.C.P
 Finish: Tin,Gold Plated
 Standard:Gold Flash all over

Recommended P.C. Board
Hole Layout

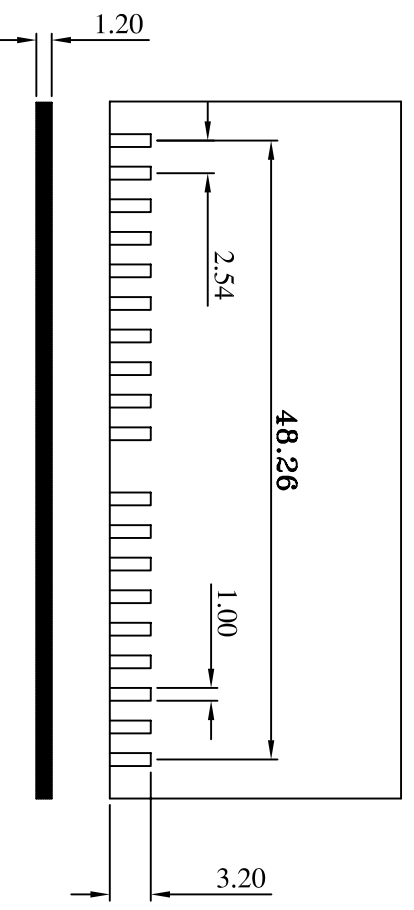

		PART NO		P1L50-220SKBKX008B		.X		.XXX	
1: P1L50-220BKHX3		DRAWING NO		PB-00218		EDITION: C		ITEM: PB	
2: P1XS0T-2534-03K		DRAWN BY		GARY		2009/03/26		SCALE: 1:1	
3: 0		APPROVAL BY						UNTT: m.m	
TEL: (02)86481727 FAX: (02)86482427									