

(RoHS Compliant)

P1 X 11 X - 2 XX S0 BK X M11 X

1 2 3 4 5 6 7 8

- Standard: A=P.B.T.  
N=Nylon-6T
- Contact Material:  
A=Phosphor Bronze  
B=Brass
- Per ROW 02 to 40
- Trail Style: S0= Straight
- Color: BK=Black
- Contact Plated:  
T=Mate Tin over Nickel  
W=Mate Tin over Nickel 150u"  
Y=Bright Tin over Nickel
- M=DIP SQ 0.60mm
- Packing:  
B= Tube  
C= Tray  
D= Box

Current Rating: 3 Amps

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max

Dielectric Withstanding: 1000 V AC

Operating Temperature: -40° ~ +105° C

Contact Material: Phosphor Bronze Brass

Insulator Material: Polyester, UL 94V-0

Standard: PBT

Finish: Tin, Gold Plated

Standard: Gold Flash all over

Note: Duplex Plating: Gold Plated on contact area, Tin on solder area


Insulator Material: Polyester, UL 94V-0

Standard: Nylon-6T

Max Processing Temp: 230° C for 60 seconds

260° C for 10 seconds

**Recommended P.C. Board Hole Layout**

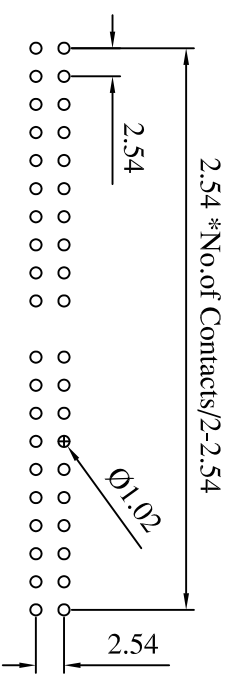

CONN TOP COMPONENT INC. ①: P1X11X-2XXS0BKXM11-2007/03/26-C		PART NO	P1X11X-2XXS0BKXM11X	X	.XX	.XXX
BOM 1:		P1X11-2XXBKHM0	DRAWING NO	PB-00108	EDITION:	C1
BOM 2:		P1X11T-606602SX	DRAWN BY	LN	2009/01/12	SCALE: 1:1
BOM 3:		H1X25-2XXBKHM0	APPROVAL BY			UNIT: m.m
TEL: (02)86481727 FAX: (02)86482427						