
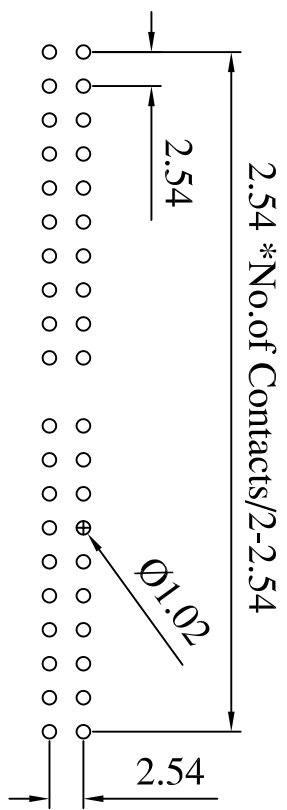
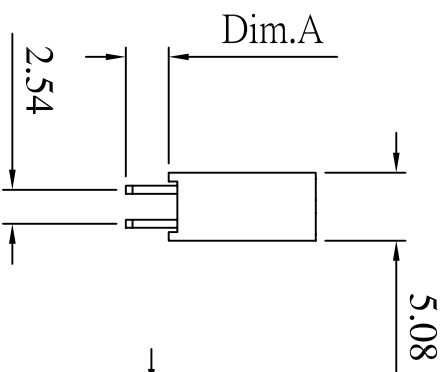


Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 1000 V AC  
 Operating Temperature: -40° ~ +105° C  
 Contact Material: Phosphor Bronze  
 Insulator Material: Brass  
 Insulator Material: Polyester, UL 94V-0  
 Standard: PBT  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over  
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T  
 Max Processing Temp: 230° C for 60 seconds  
 260° C for 10 seconds

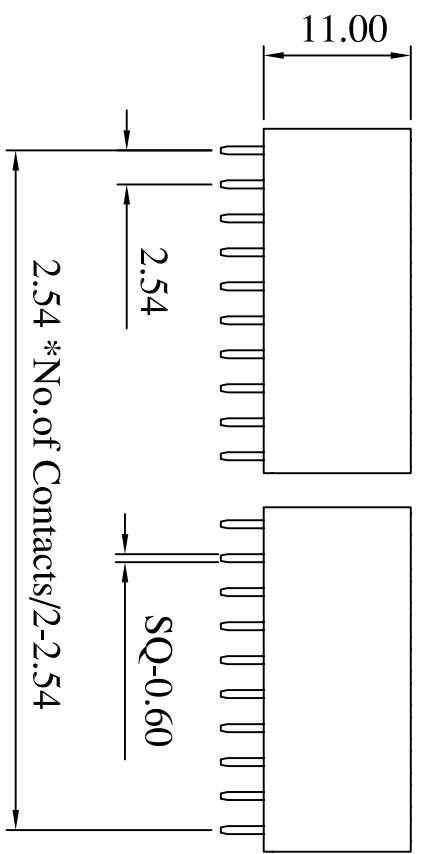

Part No.	Dim.A ±0.20
P1X11X-2XXXS0BKXM01X	3.20mm
P1X11X-2XXXS0BKXM02X	6.00mm
P1X11X-2XXXS0BKXM03X	7.90mm
P1X11X-2XXXS0BKXM04X	12.00mm
P1X11X-2XXXS0BKXM05X	2.30mm
P1X11X-2XXXS0BKXM06X	12.30mm

P1 X 11 X - 2 XX S0 BK X M00 X  
 1 2 3 4 5 6 7 8

(RoHS Compliant)

- Standard: A= P.B.T.  
N= Nylon-6T
- Contact Material:  
A=Phosphor Bronze  
B=Brass
- Per ROW 02 to 40
- Tail Style: S0= Straight
- Color: BK=Black
- Contact Plated:  
T=Matte Tin over Nickel  
W=Matte Tin over Nickel 150u"  
Y=Bright Tin over Nickel
- M=DIP SQ 0.60mm
8. Packaging:  
B= Tube  
C= Tray  
D= Box

CONN TOP COMPONENT INC.  
 P1X11X-2XXXS0BKXM00-2007/03/20-C1

PART NO	P1X11X-2XXXS0BKXM00X	X	.XX	.XXX
DRAWING NO	PB-00036	±0.3	±0.20	±0.100
DRAWN BY	LN	EDITION: C1	ITEM: PB	SCALE: 1:1
APPROVAL BY		2009/01/12	UNIT: m.m	

TEL: (02)86481727 FAX: (02)86482427