


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT


Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

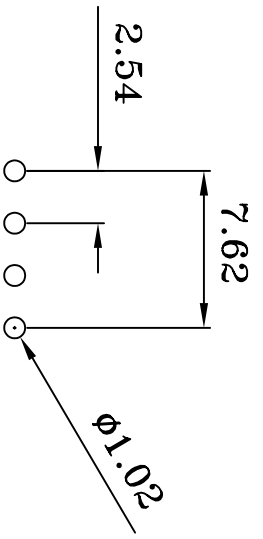

(RoHS Compliant) P1 A 38 1 04 S0 BK X 000 X
 1 2 3 4 5 6 7

- Standard:
 - A = P.B.T
- Circuits: 04 pin
- Tail Style:
 - S0 = Straight
- Color: BK=Black
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash, Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u", Tin 100u"
- Special Options
 - D=Gold 5u", Tin 100u"
 - E=Gold 5u", Tin 100u"
 - G=Gold 10u"
 - J=Gold 10u", Tin 100u"
 - L=Gold 15u"
 - M=Gold 15u", Tin 100u"
 - U=Gold 30u", Tin 100u"
 - V=Gold 30u", Tin 100u"
- Packaging:
 - A = PE Bag
 - B = Tube
 - D = Box

 CONN TOP COMPONENT INC.		PART NO	P1A38-104S0BKX000X	.X	.XX	.XXX
BOM/1:		P1A38-104BKHD	DRAWING NO	PB-00200	EDITION: C	ITEM: PB
BOM/2:		P1X38T-3055-01R	DRAWN BY	LIN	2008/08/26	SCALE: 1:1
BOM/3:			APPROVAL BY			UNIT: m.m
TEL: (02)86481727 FAX: (02)86482427						