

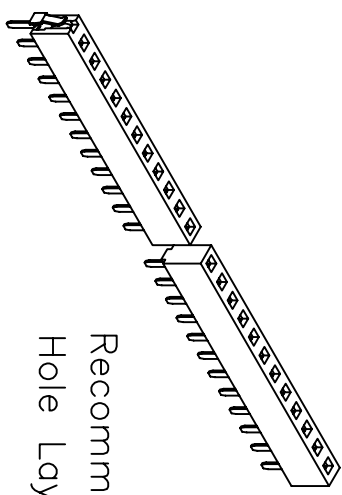
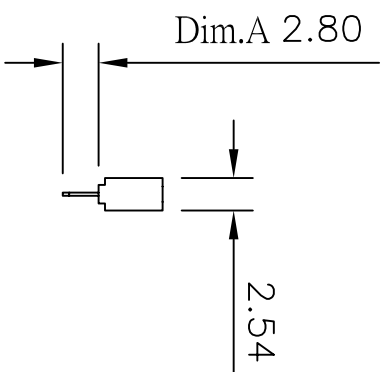
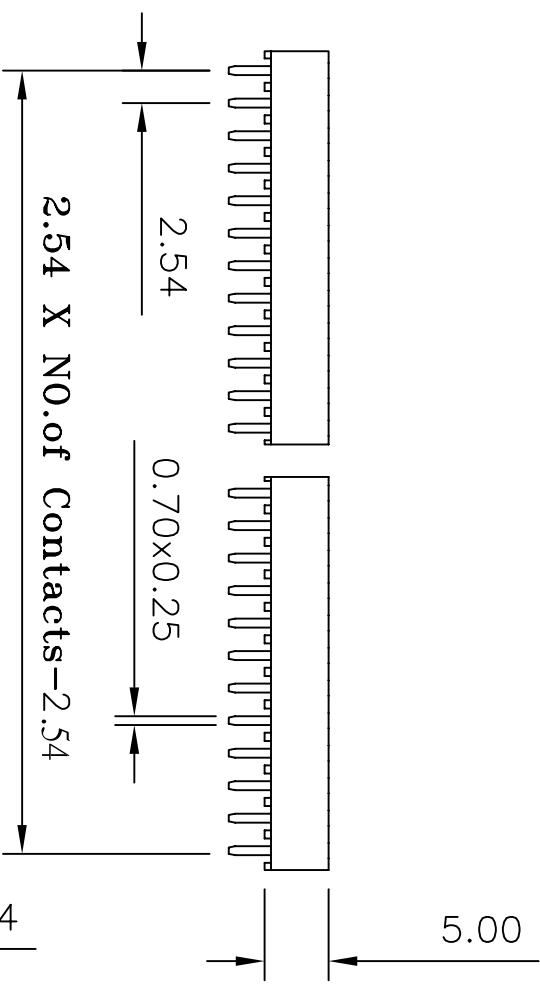


2.54 X NO.of Contacts+0.5

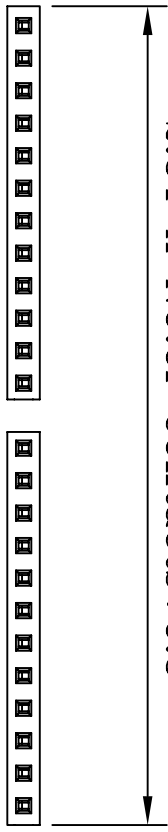

Recommended P.C. Board
Hole Layout

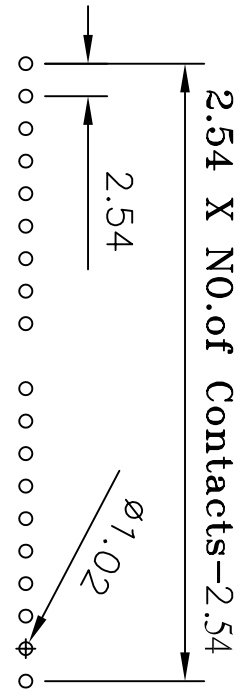

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +85° C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

P1 X 50 - 1 XX S0 BK X 000 C
 1 2 3 4 5 6 7

(RoHS Compliant)

- Standard: A= P.B.T.
N= Nylon-6T
- Per ROW 03 to 40
- Taill Style:
S0= 180° Straight
B=Gold 3u",Tin 100u"
- Color: BK=Black
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash,Tin 100u"
A=Gold 3u"
B=Gold 3u",Tin 100u"
- Special Options
D=Gold 5u"
E=Gold 5u",Tin 100u"
G=Gold 10u"
J=Gold 10u",Tin 100u"
L=Gold 15u"
M=Gold 15u",Tin 100u"
U=Gold 30u"
V=Gold 30u",Tin 100u"
- Packging:
C= Tray

①:P1X50-1XXS0BKX000-2007/03/01-C
 ②:P1X50T-253834S-2007/03/01-C

| | |
|----|-------------------|
| 1: | P1X50-1XXSBKH0 |
| 2: | ①: P1X50T-253434S |
| 3: | |

| | | | | |
|-------------|--------------------|-------------|----------|------------|
| PART NO | P1X50-1XXS0BKX000C | .X | .XX | .XXX |
| DRAWING NO | PB-00013 | ±0.3 | ±0.20 | ±0.100 |
| DRAWN BY | GARY | EDITION: C1 | ITEM: PB | SCALE: 1:1 |
| APPROVAL BY | | | | UNIT: m.m |

CONN TOP COMPONENT INC.
 TEL:(02)86481727 FAX:(02)86482427