


(RoHS Compliant) P1 N 50 P - 2 XX D1 BK X 000 B
 1 2 3 4 5 6 7 8

- Standard :
 N= Nylon-6T
 6. Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 D1=SMD With Peg Type
 B=Gold 3u",Matte Tin 100u"
- P= With Bump
- Per ROW : 02 to 40
- Tail Style :
 D1=SMD With Peg Type
- Color : BK=Black
- D=Gold 5u"
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
- Special Options
 8. Packing
 B= Tube

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard:Nylon-6T
 Finish: Tin,Gold Plated
 Standard:Gold Flash all over

Recommended P.C. Board
 SMD Layout

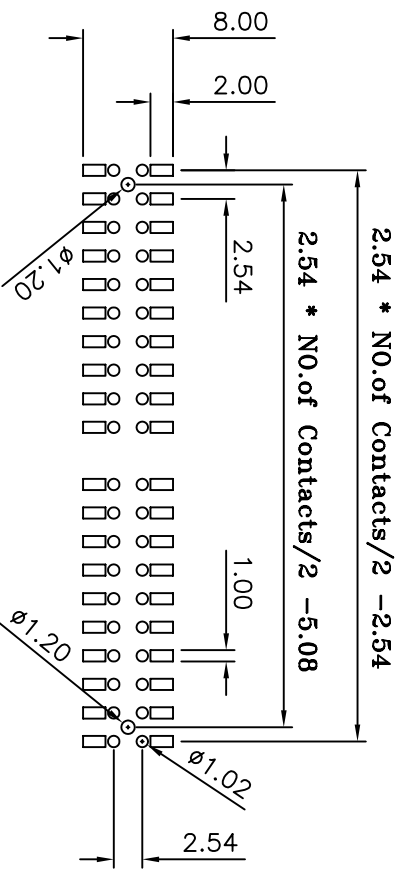

		PART NO	PIN50P-2XXD1BKX000B	.X	.XXX
1:	PIN50P-2XXBKHI-H	DRAWING NO	PB-00205	±0.3	±0.20
2:	P1X50T-2537-01D	DRAWN BY	GARY	EDITION: C	ITEM: PB
3:		APPROVAL BY		2008/11/24	SCALE: 1:1
TEL: (02)86481727 FAX: (02)86482427					UNIT: m.m