

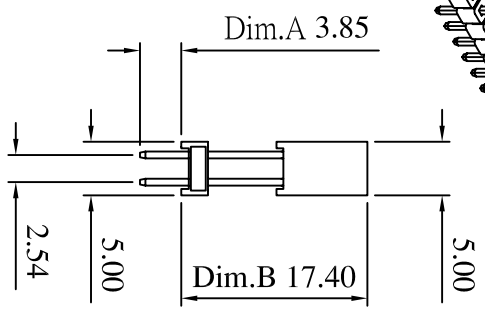
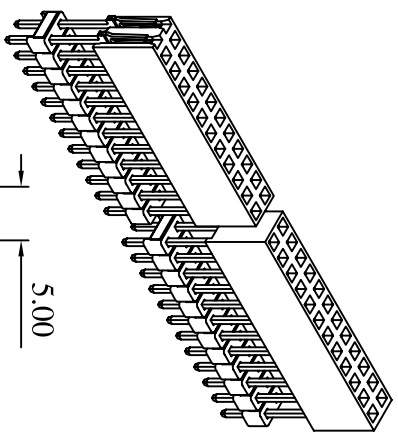


①: 2.54 * No. of Contacts/2 ± 0.6 ± 0.3

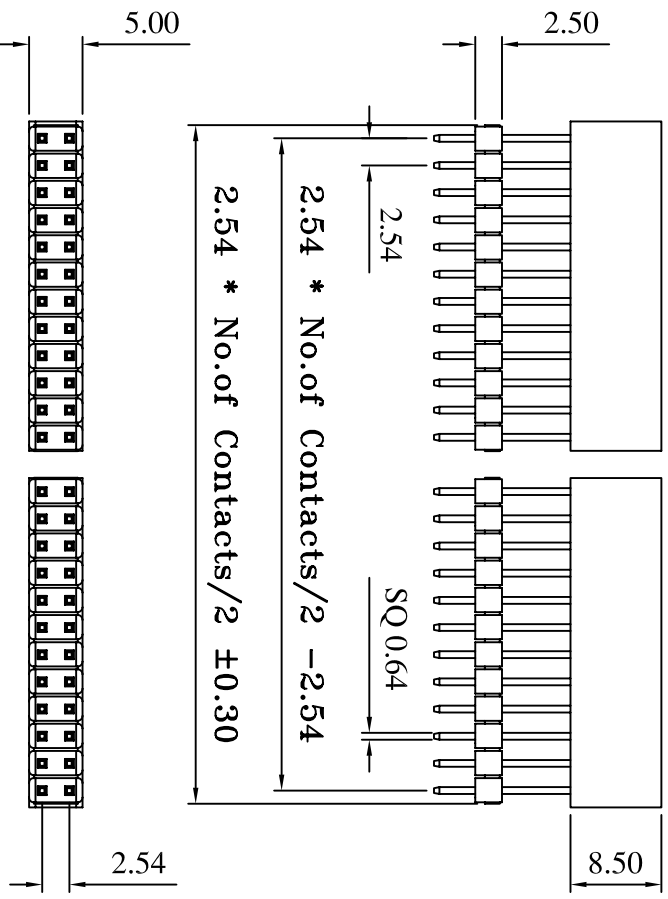

Recommended P.C. Board
Hole Layout

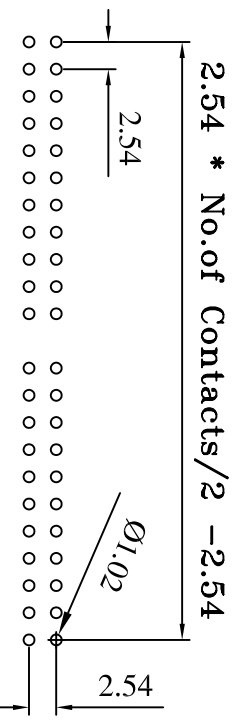

- Current Rating: 3 Amps
- Insulator Resistance: 5000 Megohms min
- Contact Resistance: 20 m ohms max
- Dielectric Withstanding: 1000 V AC
- Operating Temperature: -40° ~ +105° C
- Contact Material: Copper Alloy
- Insulator Material: Polyester; UL 94V-0
- Standard: PBT
- Finish: Tin, Gold Plated
- Standard: Gold Flash all over
- Note: Duplex Plating: Gold Plated on contact area, Tin on solder area
- Insulator Material: Polyester; UL 94V-0
- Standard: Nylon-6T
- Max Processing Temp: 230° C for 60 seconds
- Max Processing Temp: 260° C for 10 seconds

- (RoHS Compliant)
1. Standard: A=P.B.T.
N=Nylon-6T
2. Contact Material:
A=Phosphor Bronze
Blank=Brass
3. Per ROW : 02 to 40
4. Tail Style: S0= Straight
5. Color: BK=Black
6. Contact Plated:
T=Mate Tin over Nickel
W=Mate Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash, Mate Tin 100u"
A=Gold 3u"
B=Gold 3u", Mate Tin 100u"
7. W = DIP SQ 0.64mm
8. Packing:
D= Box
- P1 X 85 X - 2 XX S0 BK X W11 D
- 1 2 3 4 5 6 7 8

① 2.54*No. of Contacts/2±0.6-2008/04/23-C		CONN TOP COMPONENT INC.	
1: PIX85-2XXBKH0	DRAWING NO	PB-00194	EDITION: C1
2: PIX11T-646604S	DRAWN BY	GARY	2008/10/14
3: H1X25-2XXBKH0	APPROVAL BY		
TEL: (02)86481727 FAX: (02)86482427			
	PART NO	PIX85X-2XXXS0BKXW111D	X .XX .XXX
			±0.3 ±0.20 ±0.100
			ITEM: PB
			SCALE: 1:1
			UNIT: m.m