


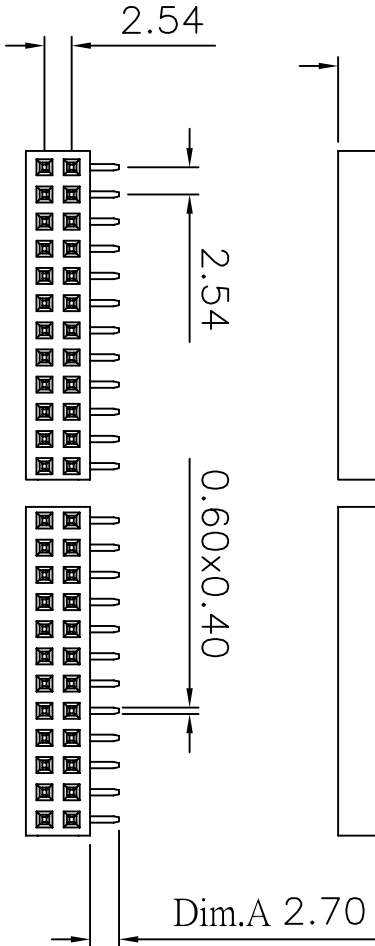
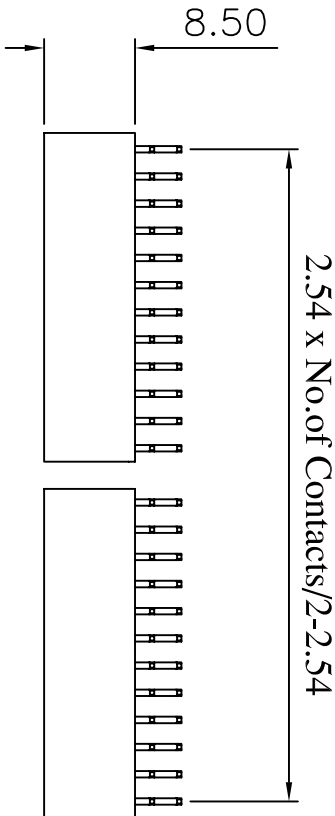
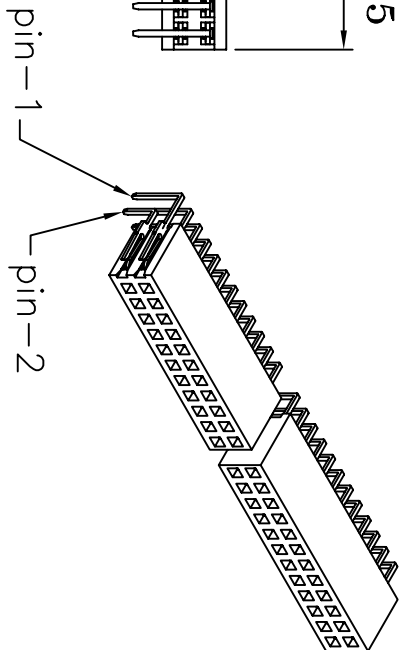


2.54 X No.of Contacts/2+0.5

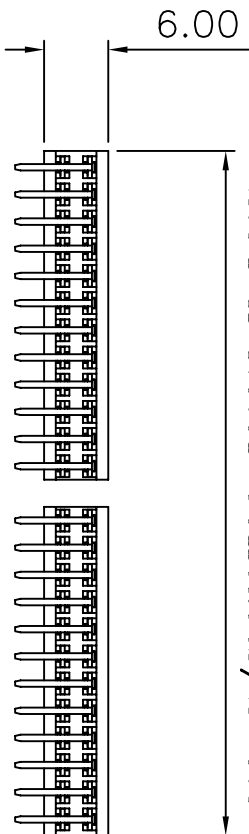

Dim.B 10.10±0.25

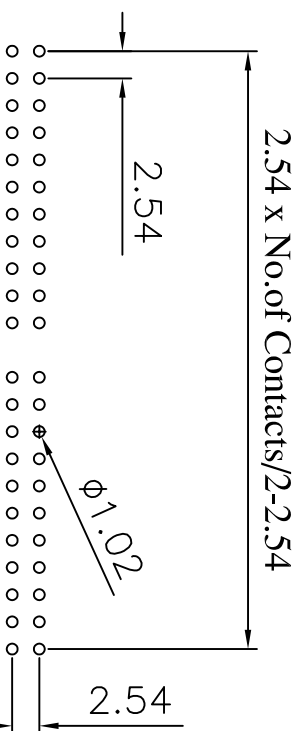

Recommended P.C. Board Hole Layout

2.54 x No.of Contacts/2-2.54

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0 Standard: PBT

Finish: Tin, Gold Plated
 Standard: Gold Flash all over
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area

Insulator Material: Polyester, UL 94V-0 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

(RoHS Compliant) P1 X 86- 2 XX R0 BK X 000 X
 1 2 3 4 5 6 7

- Standard: B=Nylon-9T, N=Nylon-6T, 2. Per ROW 02 to 40, 3. Tail Style: R0= Right Angle, 4. Color: BK=Black
- Contact Plated: T=Matte Tin over Nickel, W=Matte Tin over Nickel 150u", Y=Bright Tin over Nickel, C=Gold Flash, Tin 100u", F=Gold Flash, Tin 100u", A=Gold 3u", B=Gold 3u", Tin 100u"
- Special Options: D=Gold 5u", E=Gold 5u", Tin 100u", G=Gold 10u", J=Gold 10u", Tin 100u", L=Gold 15u", M=Gold 15u", Tin 100u", U=Gold 30u", V=Gold 30u", Tin 100u"
- Packing: A= PE Bag, B= Tube, D= Box



CONN TOP COMPONENT INC.

①:PIX86-2XXR0BKX000-2007/01/18-C

1:	PIX86-2XXR0BKX000
2:	PIX85T-6263-R1
3:	PIX85T-6211-R2

PART NO	PIX86-2XXR0BKX000X	.X	.XX	.XXX
DRAWING NO	PB-00034	±0.3	±0.20	±0.100
DRAWN BY	LIN	EDITION: C1	SCALE: 1:1	ITEM: PB
APPROVAL BY		2009/01/12		UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427