




**2.0 \* No.of contacts/2 -2.00**

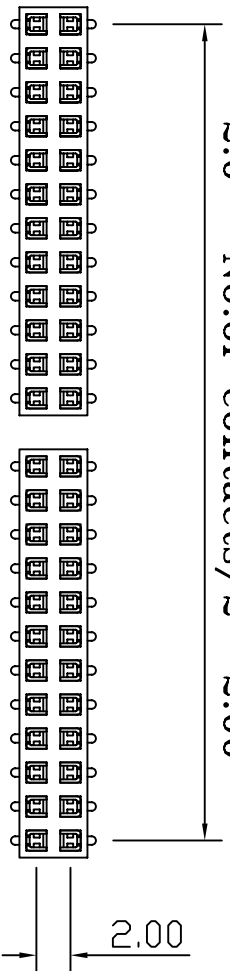

**2.0 \* No.of contacts/2**


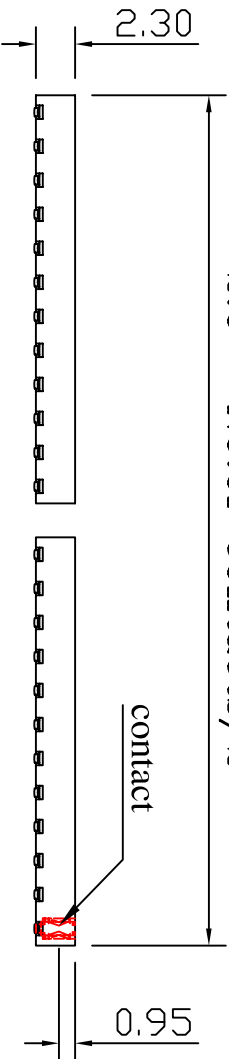


**Dim.A 5.00**

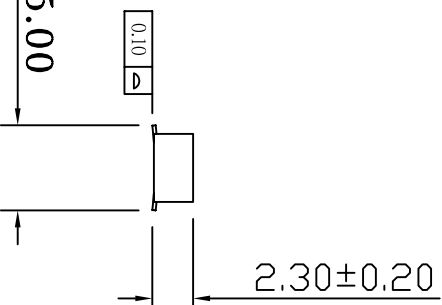

Recommended P.C. Board  
SMD Layout

**2.0 \* No.of contacts/2 -2.00**

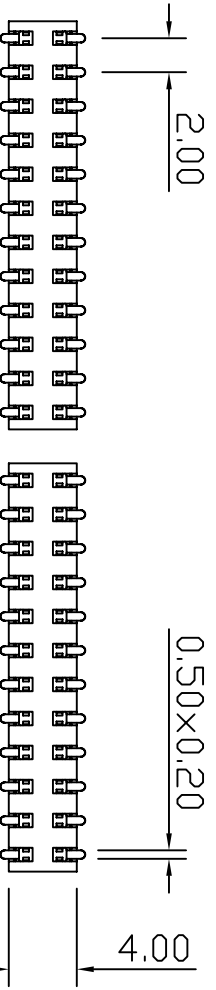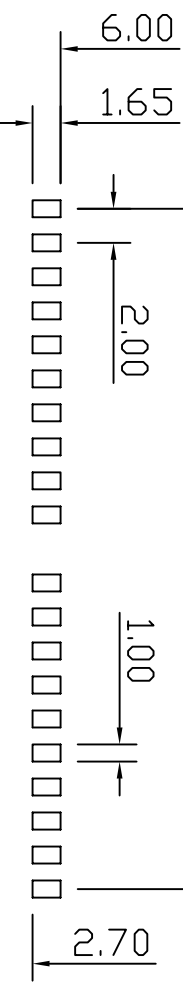


(RoHS Compliant)  
P2 N 23- 2 XX D0 BK X 000 B  
1 2 3 4 5 6 7

- Standard: Nylon-6T
- Per RDW 02 to 40
- Tail Style:
  - D0= SMD No Peg Type
  - D1= SMD With Peg Type
  - Color:
    - BK=Black
- Contact Plated:
  - T=Matte Tin over Nickel
  - W=Matte Tin over Nickel 150u"
  - Y=Bright Tin over Nickel
  - C=Gold Flash
  - F=Gold Flash,Matte Tin 100u"
  - A=Gold 3u"
  - B=Gold 3u",Matte Tin 100u"
- Special Options:
  - D=Gold 5u"
  - E=Gold 5u",Matte Tin 100u"
  - G=Gold 10u"
  - J=Gold 10u",Matte Tin 100u"
  - L=Gold 15u"
  - M=Gold 15u",Matte Tin 100u"
  - U=Gold 30u"
  - V=Gold 30u",Matte Tin 100u"
- Packaging:
  - B= Tube

- Current Rating: 2 Amps
- Insulator Resistance: 5000 Megohms min
- Contact Resistance: 20 m ohms max
- Dielectric Withstanding: 500 V AC
- Operating Temperature: -40° ~ +105° C
- Max Processing Temp: 230° C for 60 seconds
- Contact Material: 260° C for 10 seconds
- Insulator Material: Phosphor Bronze
- Standard:Nylon-6T

Finish: Tin,Gold Plated  
Standard:Gold Flash all over

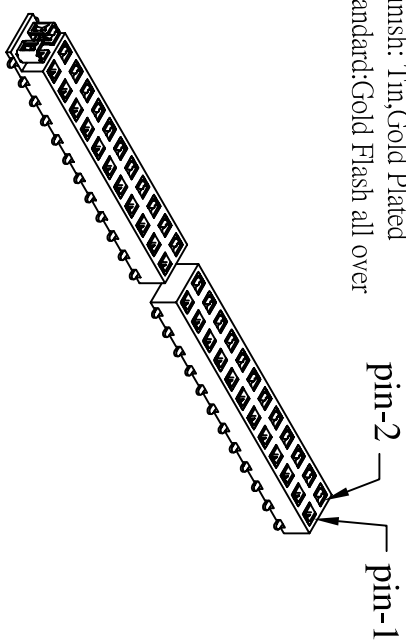

PART NO		P2N23-2XXDBKX000B		.X		.XX		.XXX	
DRAWING NO		P200-00057		±0.3		±0.2		±0.100	
DRAWN BY		GARY		EDITION: C1		SCALE: 1:1		ITEM: P200	
APPROVAL BY				2009/02/20		SCALE: 1:1		UNIT: m.m	

①:P2N23-2XXDBKX000-2007/4/16-C  
TEL:(02)86481727 FAX:(02)86482427