




2.0 X (No.of contacts/2)

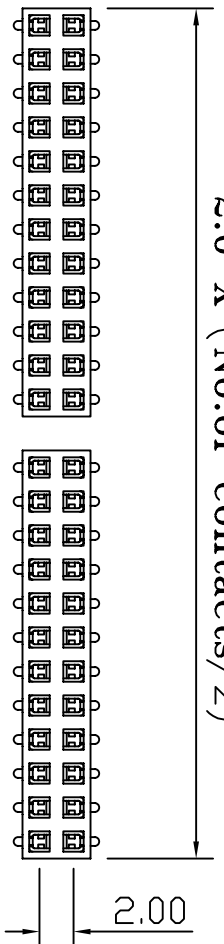

2.0 X (No.of contacts/2-1)

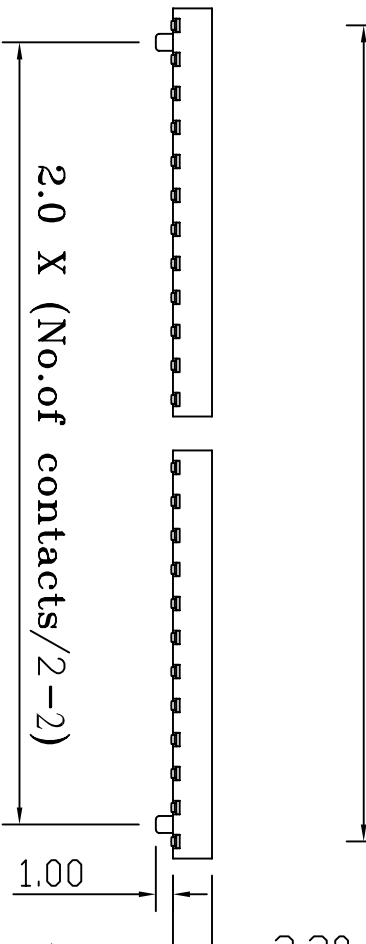


2.0 X (No.of contacts/2-2)

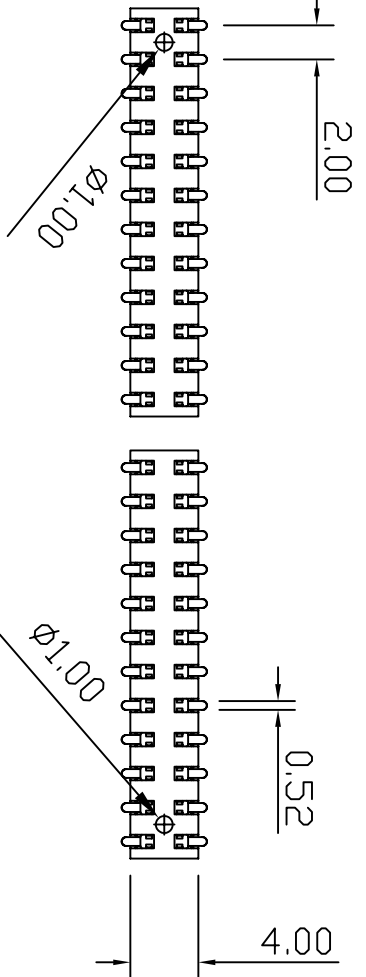

Current Rating: 1 Amps  
Insulator Resistance: 1000 Megohms min  
Contact Resistance: 20 m ohms max  
Dielectric Withstanding: AC 500 V  
Operating Temperature: -40° ~ +85° C  
Max Processing Temp: 230° C for 60 seconds  
260° C for 10 seconds


Contact Material: Phosphor Bronze  
Insulator Material: Polyester, UL 94V-0  
Standard: Nylon-6T

Finish: Tin, Gold Plated  
Standard: Gold Flash all over

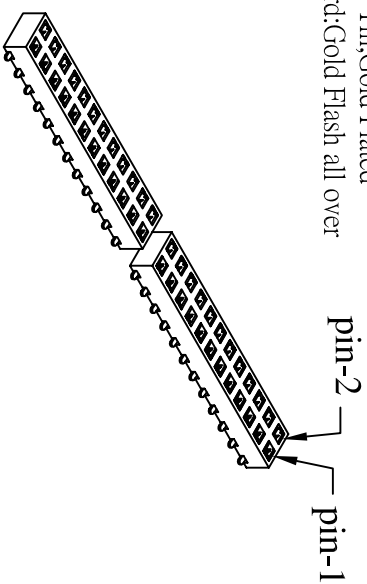

Recommended P.C. Board  
SMD Layout

2.0 X (No.of contacts/2-1)

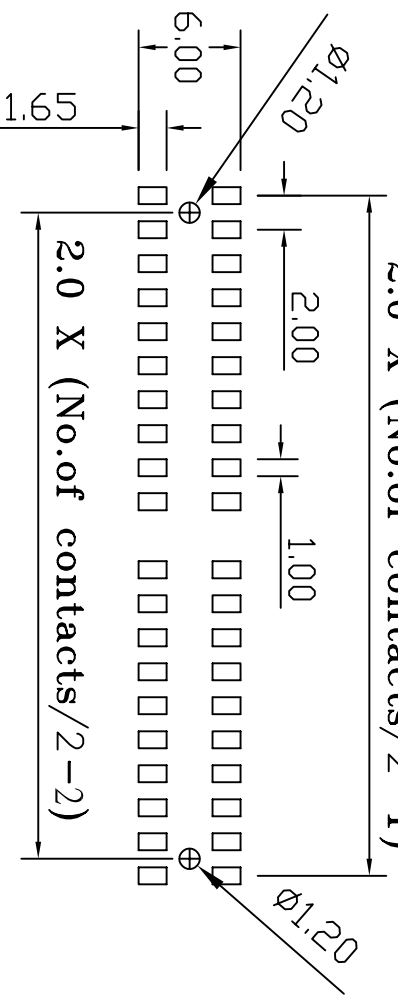

2.0 X (No.of contacts/2-2)

P2 N 23-2 XX D3 BK X 000  
1 2 3 4 5 6

(RoHS Compliant)

- Standard: Nylon-6T
- Per RDW: 02 to 40
- Tail Style:
  - D3= SMD With Peg Type
  - Ø1.00mmx1.00mm
- Color: BK=Black
- Contact Plated:
  - T=Matte Tin over Nickel
  - W=Matte Tin over Nickel
  - Y=Brighe Tin over Nickel
  - C=Gold Flash
  - F=Gold Flash,Matte Tin 100u"
  - A=Gold 3u"
  - B=Gold 3u",Matte Tin 100u"
  - D=Gold 5u"
  - E=Gold 5u",Matte Tin 100u"
  - G=Gold 10u"
  - H=Gold 10u",Matte Tin 100u"
  - J=Gold 15u"
  - L=Gold 15u",Matte Tin 100u"
  - M=Gold 15u",Matte Tin 100u"
  - U=Gold 30u"
  - V=Gold 30u",Matte Tin 100u"
- Special Options



1:	P2N23-2XXBKX000	DRAWING NO	P200-T0029	EDITION:	T	ITEM:	P200
2:	P200T-201813D-01	DRAWN BY	GARY	SCALE:	1:1	SCALE:	1:1
3:		APPROVAL BY		UNIT:	m.m		

TEL: (02)86481727 FAX: (02)86482427