

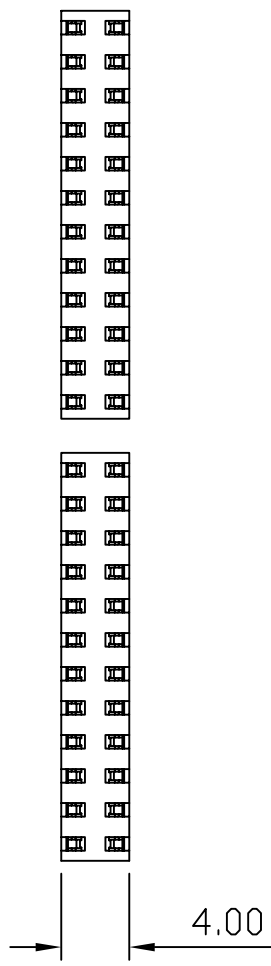
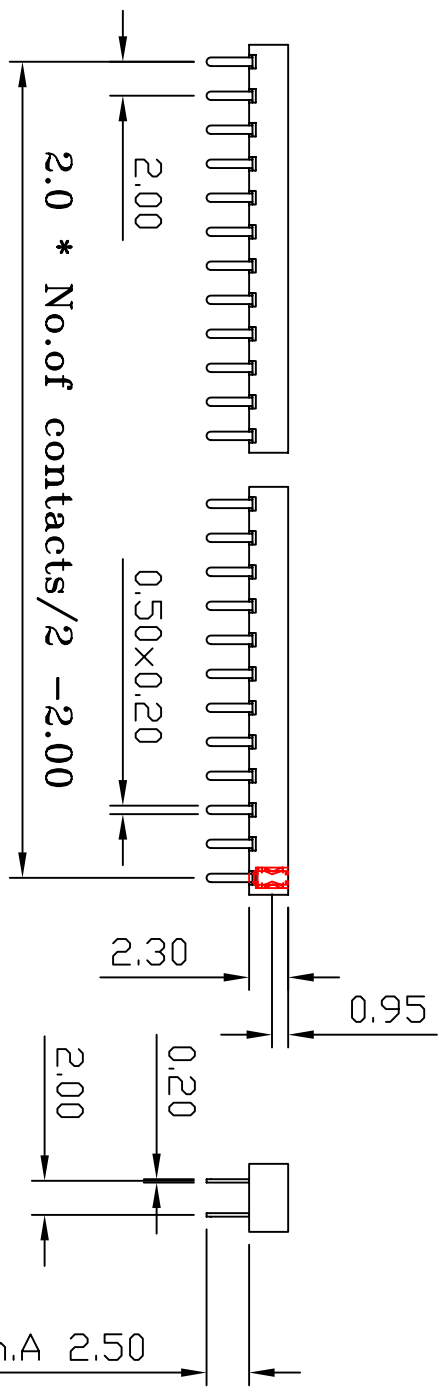



2.0 * No.of contacts/2

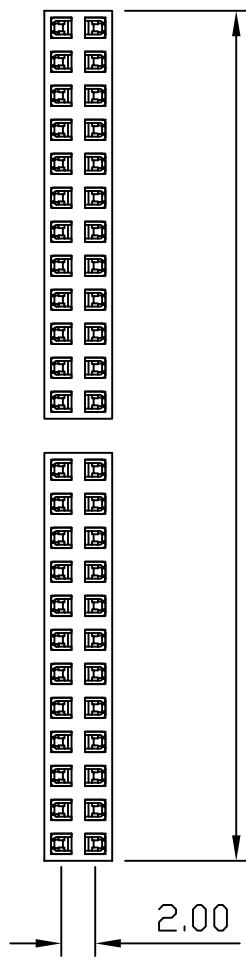

Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

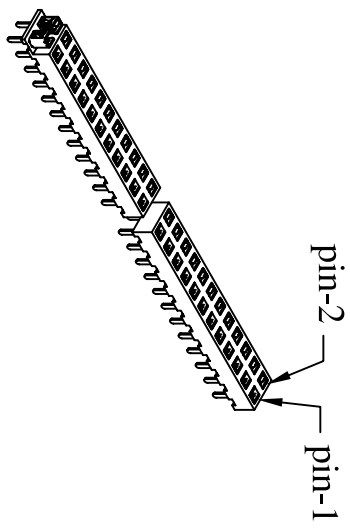

Recommended P.C. Board
 Hole Layout

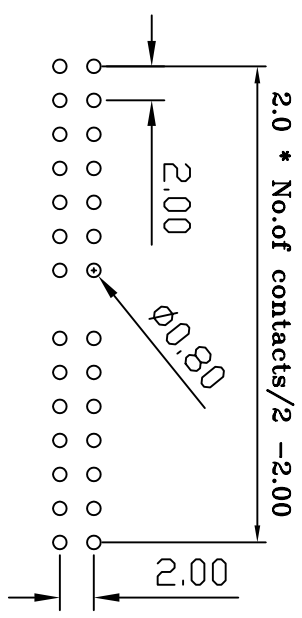

(RoHS Compliant)
 P2 N 23 - 2 XX S0 BK X 000 X
 1 2 3 4 5 6 7

- Standard Nylon-6T
- Per RDV: 02 to 40
- Tall Style!
S0= Straight
- Color: BK=Black
- Contact Plated:
T=Matte Tin over Nickel
V=Matte Tin over Nickel
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash, Matte Tin 100u"
A=Gold 3u"
B=Gold 3u", Matte Tin 100u"
- Special Options:
E=Gold 5u", Matte Tin 100u"
W=Matte Tin over Nickel 150u"
J=Gold 10u", Matte Tin 100u"
L=Gold 15u"
M=Gold 15u", Matte Tin 100u"
U=Gold 30u"
V=Gold 30u", Matte Tin 100u"
- Packings:
B=Tube
C=Tray
D=Box

CONN TOP COMPONENT INC. TEL: (02)86481727 FAX: (02)86482427		P2N23-2XXS0BKX000-2007/04/16-C	
PART NO	P2N23-2XXS0BKX000X	.X	.XXX
DRAWING NO	P200-00059	±0.3	±0.20
DRAWN BY	GARY	EDITION: C1	ITEM: P200
APPROVAL BY		2009/02/20	SCALE: 1:1
			UNIT: m.m