


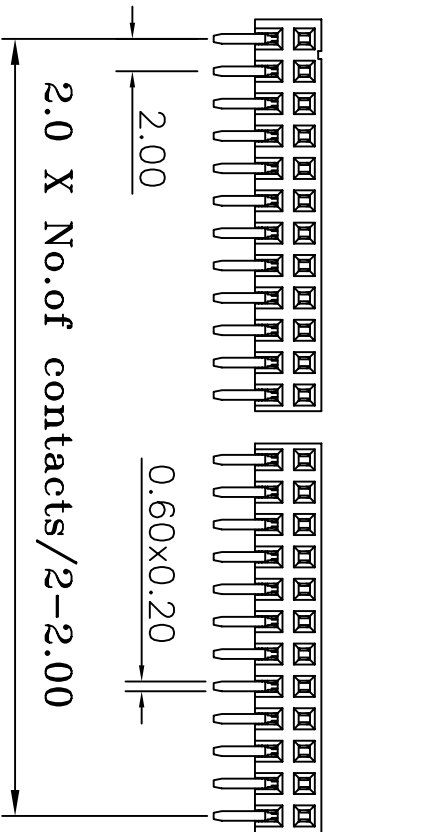
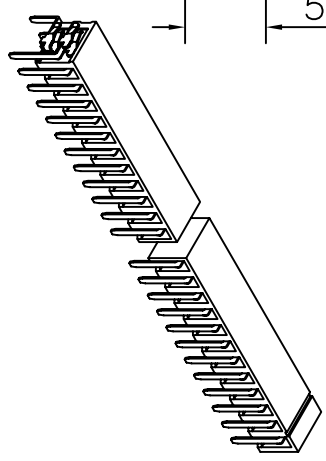



2.0 X No.of contacts/2 +0.40

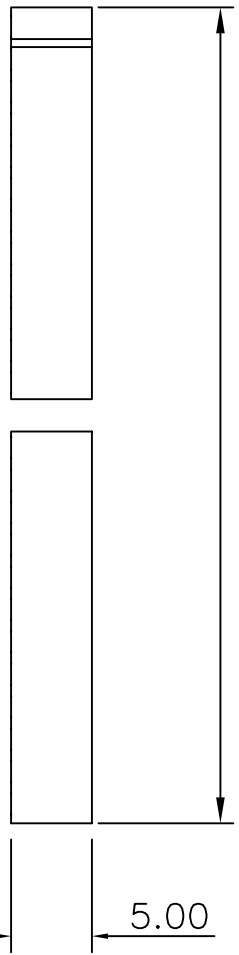


Dim.A 2.55±0.25

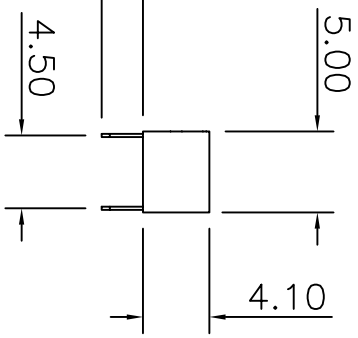

Recommended P.C. Board
Hole Layout

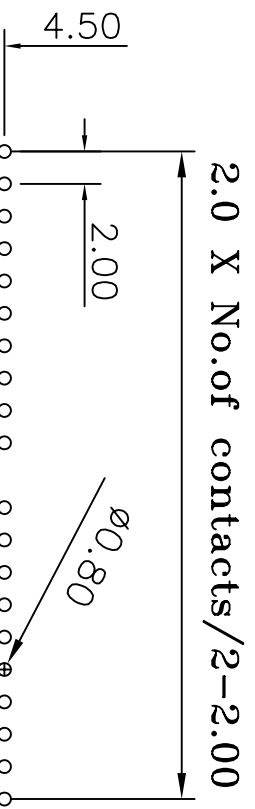

2.0 X No.of contacts/2-2.00



Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Finish: Tin,Gold Plated
 Standard:Nylon-6T
 Standard:Gold Flash all over

(RoHS Compliant)
P2 N 41- 2 XX R0 BK X 000 B
 1 2 3 4 5 6 7

- Standard: Nylon-6T
- Per ROW 02 to 40
- Tail Style:
R0=Right Angle
- Color:
BK=Black
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash,Matte Tin 100u"
A=Gold 3u"
B=Gold 3u",Matte Tin 100u"
D=Gold 5u"
- Special Options
- Packing: B=Tube

©:P2N41-2XXR0BKX000-2007/03/23-C



PART NO	P2N41-2XXR0BKX000B	X	XX	XXX
DRAWING NO	P200-00047	±0.3	±0.20	±0.100

BOM 1:	P2N41-2XXR0BKX000	DRAWN BY	LN	EDITION:	C1	ITEM:	P200
BOM 2:	P2N41T-2032-01	DRAWN BY	LN	EDITION:	C1	SCALE:	1:1
BOM 3:	P2N41T-2032-02	APPROVAL BY				UNIT:	m.m

TEL:(02)86481727 FAX:(02)86482427