

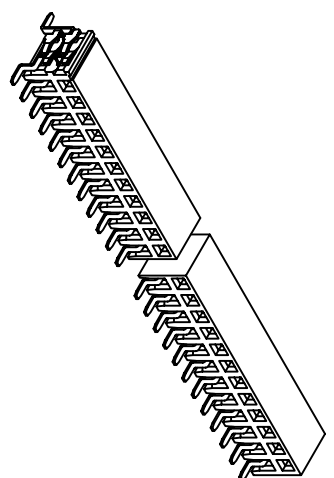




2.0 X No.of contacts/2 +0.40

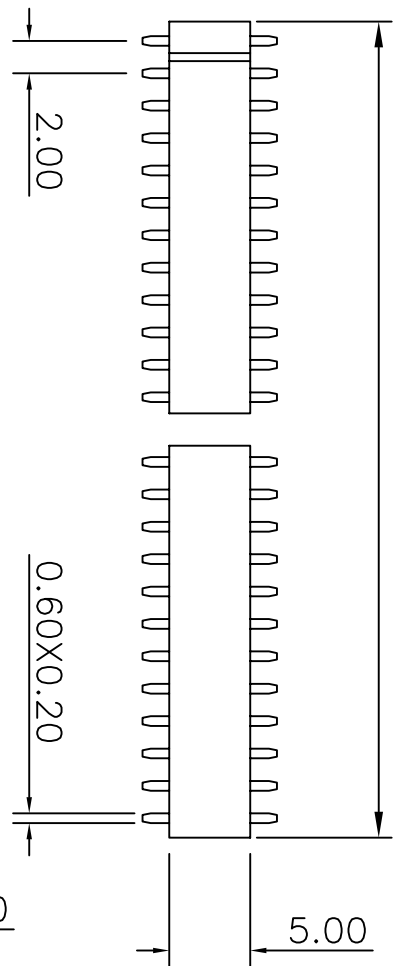

Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Phosphor Bronze
 Contact Material: Polyester, UL 94V-0
 Insulator Material: Standard:Nylon-6T
 Finish: Tin,Gold Plated
 Standard:Gold Flash all over




2.0 X No.of contacts/2-2.00

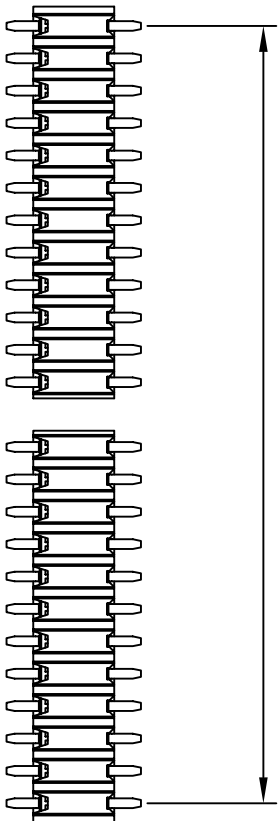

Recommended P.C. Board
 SMD Layout

2.0 X No.of contacts/2-2.00

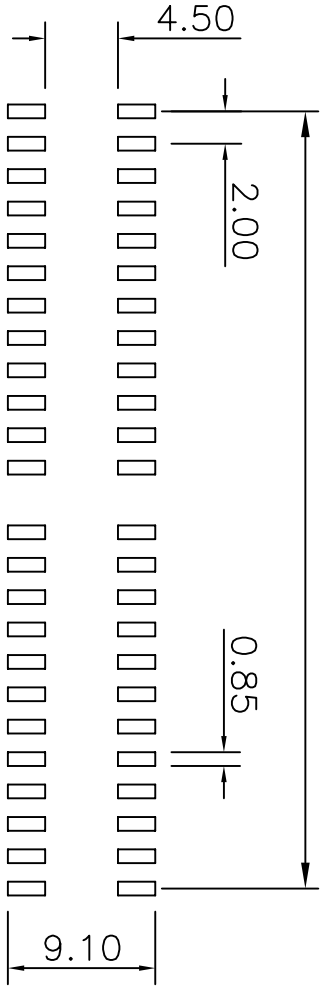

(RoHS Compliant)

P2 N 42- 2 XX D0 BK X 000 B
 1 2 3 4 5 6 7

- Standard: Nylon-6T
- Per ROW 02 to 40
- Taill Style:
 D0= SMD No Peg Type
- Color:
 BK=Black
- Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u"
 B=Gold 3u",Matte Tin 100u"
- Special Options:
 D=Gold 5u"
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
- Peckings:
 B= Tube



CONN TOP
 COMPONENT INC.

①:P2N42-2XXD0BKX000-2008/02/01-C1		PART NO		P2N42-2XXD0BKX000B	.X	.XXX
②:P2N41T-2032-03&04-2007/08/06-C		DRAWING NO		P200-00075	±0.3	±0.20
③:P2N41T-2032-01		DRAWN BY		GARY	EDITION: C2	
④:P2N41T-2032-02		APPROVAL BY			SCALE: 1:1	
TEL:(02)86481727 FAX:(02)86482427					ITEM: P200	
					UNIT: m.m	