A TYPE

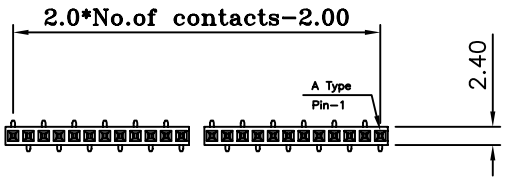



B TYPE

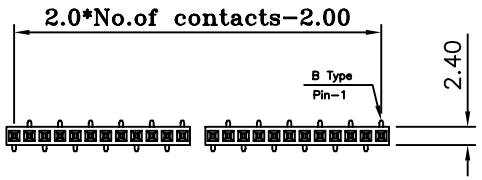

Current Rating:	2 Amps
Insulator Resistance:	1000 Megohms min
Contact Resistance:	20 m ohms max
Dielectric Withstanding:	500 V AC
Operating Temperature:	- 40° ~ +85° C
Max Processing Temp:	230° C for 60 seconds 260° C for 10 seconds
Contact Material:	Phosphor Bronze
Insulator Material:	Polyester,UL 94V-0 Standard:Nylon-6T

Finish: Tin,Gold Plated
Standard:Gold Flash all over

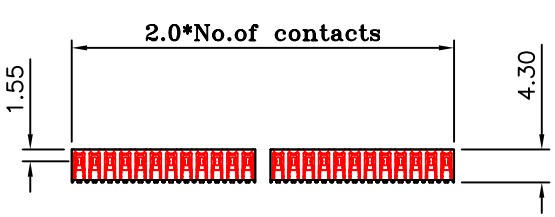



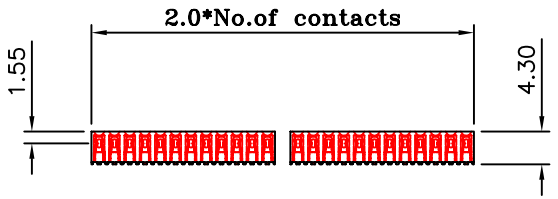



A TYPE

Recommended P.C. Board
SMD Layout

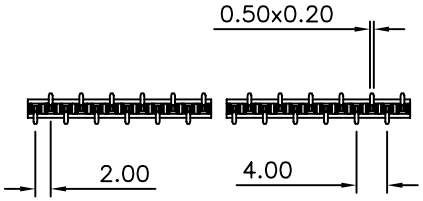

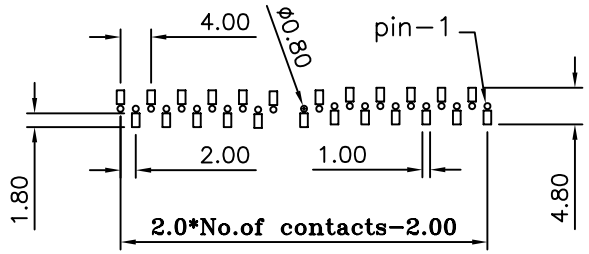

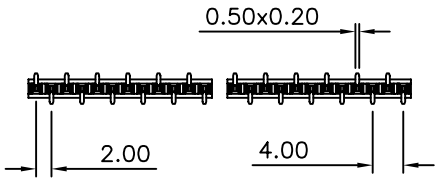



B TYPE

Recommended P.C. Board
SMD Layout

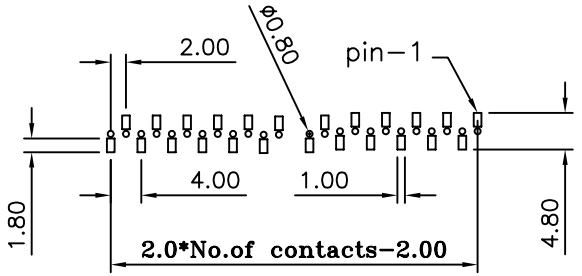

(RoHS Compliant)

P2 N 43 - 1 XX DX BK X 000 B
1 2 3 4 5 6 7

1. Standard: Nylon-6T
2. Per ROW 03 to 40
3. Taill Style:
   DA= S.M.D A Type
   DB= S.M.D B Type
4. Color: BK=Black
5. Contact Plated:
   T=Matte Tin over Nickel
   W=Matte Tin over Nickel 150u"
   Y=Bright Tin over Nickel
   C=Gold Flash
   F=Gold Flash,Matte Tin 100u"
   A=Gold 3u"
   B=Gold 3u",Matte Tin 100u"
   D=Gold 5u"
   E=Gold 5u",Matte Tin 100u"
   G=Gold 10u"
   J=Gold 10u",Matte Tin 100u"
   L=Gold 15u"
   M=Gold 15u",Matte Tin 100u"
   U=Gold 30u"
   V=Gold 30u",Matte Tin 100u"
6. Special Options
7. Packing: B=Tube

②:P2N43-1XXDXBKX000-2007/10/08-C1
①:P200T-203413D-2007/03/30-C

CONN TOP COMPONENT INC.

BOM
1: P2N43-1XXBKH0
2: ①:P200T-203314D
3:

TEL:(02)86481727 FAX:(02)86482427

PART NO	P2N43-1XXDXBKX000B	.X ±0.3	.XX ±0.20	.XXX ±0.100
DRAWING NO	P200-00054	EDITION: C2		ITEM: P200
DRAWN BY	LIN	2008/05/20		SCALE: 1:1
APPROVAL BY				UNIT: m.m