


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

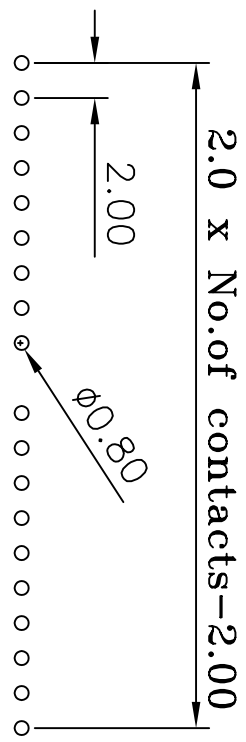

Recommended P.C. Board
 Hole Layout

P2 N 43 - 1 XX R0 BK X 000 X
 1 2 3 4 5 6 7

(RoHS Compliant)

- Standard: Nylon-6T
- Per ROW 03 to 40
- Taill Style: R0= Right Angle
- Color: BK=Black
- Contact Plated: T=Matte Tin over Nickel, W=Matte Tin over Nickel, Y=Bright Tin over Nickel, C=Gold Flash, F=Gold Flash, Matte Tin 100u", A=Gold 3u", B=Gold 3u", Matte Tin 100u"
- Special Options: D=Gold 5u", E=Gold 5u", Matte Tin 100u", G=Gold 10u", J=Gold 10u", Matte Tin 100u", L=Gold 15u", M=Gold 15u", Matte Tin 100u", U=Gold 30u", V=Gold 30u", Matte Tin 100u"
- Packaging: B=Tube, C=Troy, D=Box

①: P2N43-1XXR0BKX000-2007/03/30-C		CONN TOP COMPONENT INC.		PART NO		P2N43-1XXR0BKX000X		.X		.XX		.XXX	
BOM 1: P2N43-1XXBKH0		DRAWING NO		P200-00053		EDITION: C1		ITEM: P200		SCALE: 1:1		UNIT: m.m	
BOM 2: P200T-20332R		DRAWN BY		LIN		2008/05/20							
BOM 3:		APPROVAL BY											
TEL: (02)86481727		FAX: (02)86482427											