



Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +85° C
 Max Processing Temp: 230° C for 60 seconds
 Contact Material: 260° C for 10 seconds
 Insulator Material: Phosphor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over
 Polyester, UL 94V-0
 Standard: Nylon-6T

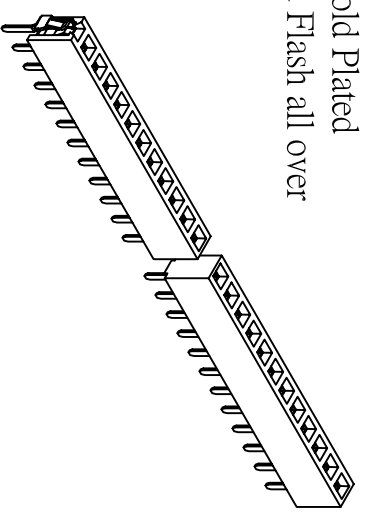

Recommended P.C. Board
 Hole Layout

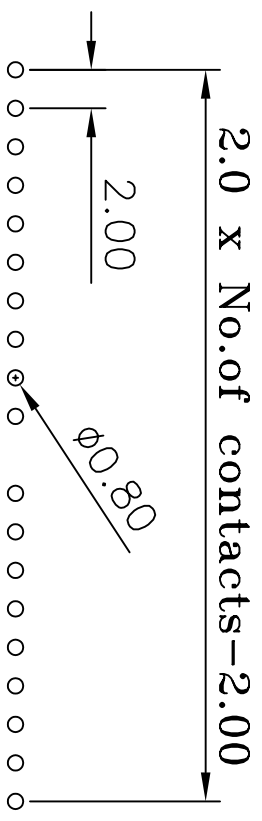

(RoHS Compliant) P2 N 43 - 1 XX S0 BK X 000 X
 1 1 2 3 4 5 6 7

- Standard: Nylon-6T
- Per ROW 03 to 40
- Taill Style:
S0= Straight
- Color: BK=Black
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash,Matte Tin 100u"
A=Gold 3u"
B=Gold 3u",Matte Tin 100u"
- Special Options:
D=Gold 5u"
E=Gold 5u",Matte Tin 100u"
G=Gold 10u"
J=Gold 10u",Matte Tin 100u"
L=Gold 15u"
M=Gold 15u",Matte Tin 100u"
U=Gold 30u"
V=Gold 30u",Matte Tin 100u"
- Packging:
B=Tube
C=Tray
D=Box

| | | | | | | | | | | | |
|-----------------------------------|--|-------------|--|--------------------|--|-------------|--|------------|--|------------|--|
| CONN TOP COMPONENT INC. | | PART NO | | P2N43-1XXS0BKX000X | | .X | | .XX | | .XXX | |
| P2N43-1XXBKHO | | DRAWING NO | | P200-00052 | | EDITION: C2 | | ITEM: P200 | | SCALE: 1:1 | |
| BOM 2: P200T-202635S1 | | DRAWN BY | | LIN | | 2008/04/22 | | SCALE: 1:1 | | UNIT: m.m | |
| TEL:(02)86481727 FAX:(02)86482427 | | APPROVAL BY | | | | | | | | | |