

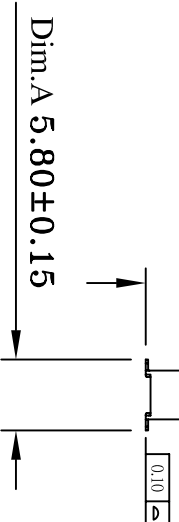


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

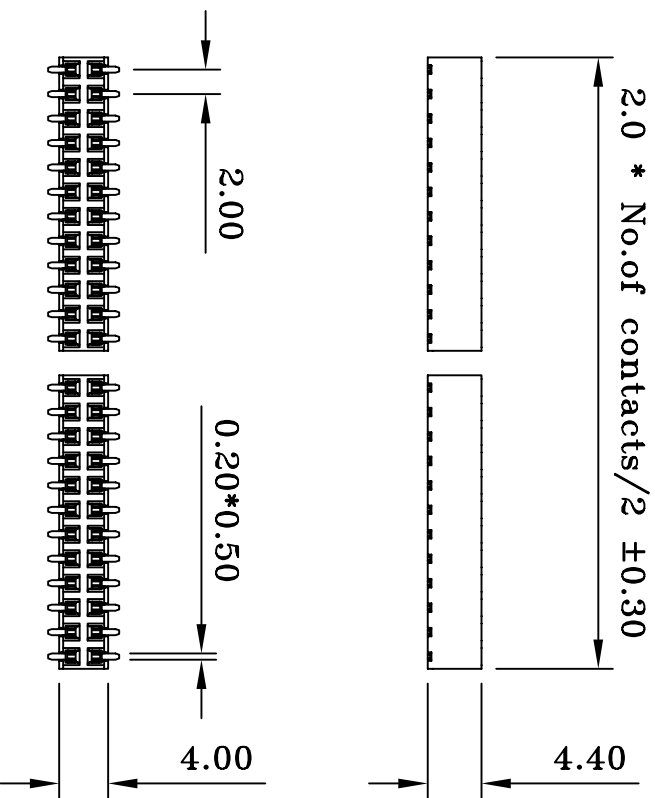

4.40±0.15

**Recommended P.C. Board
SMD Layout**

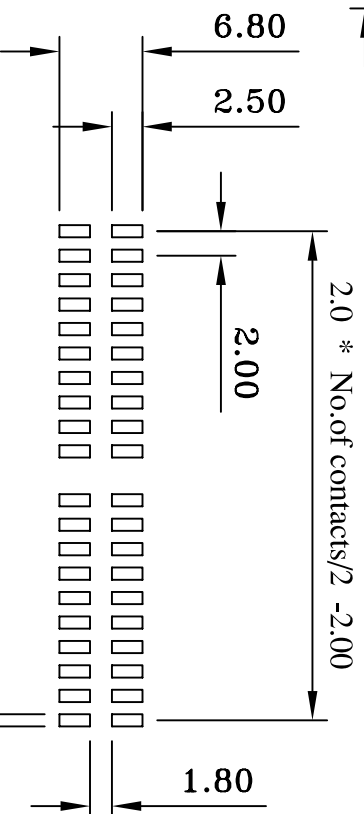

(RoHS Compliant) P2 N 44 - 2 XX D0 BK X 000 B
 1 2 3 4 5 6 7

- Standard: Nylon-6T
- Per ROW 02 to 40
- Taill Style:
 - D0= S.M.D W/O Peg
 - D1= S.M.D With Peg
 - 4. Color: BK=Black
WH=White
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash,Matte Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u",Matte Tin 100u"
- Special Options
 - D=Gold 5u"
 - E=Gold 5u",Matte Tin 100u"
 - G=Gold 10u"
 - H=Gold 10u",Matte Tin 100u"
 - J=Gold 15u"
 - I=Gold 15u",Matte Tin 100u"
 - M=Gold 15u",Matte Tin 100u"
 - U=Gold 30u"
 - V=Gold 30u",Matte Tin 100u"
- Packaging:
 - B= Tube



CONN TOP
COMPONENT INC.

©:P2N44-2XXD0BKX000-2007/2/26-C

1:	P2N44-2XXBKH0	DRAWING NO	P200-00020	EDITION:	C1	ITEM:	P200
2:	P200T-203314D	DRAWN BY	GARY	SCALE:	1:1	SCALE:	1:1
3:		APPROVAL BY				UNIT:	m.m
TEL:(02)86481727 FAX:(02)86482427		PART NO		P2N44-2XXD0BKX000B		X	.XX
						±0.3	±0.20
						.XXX ±0.100	