

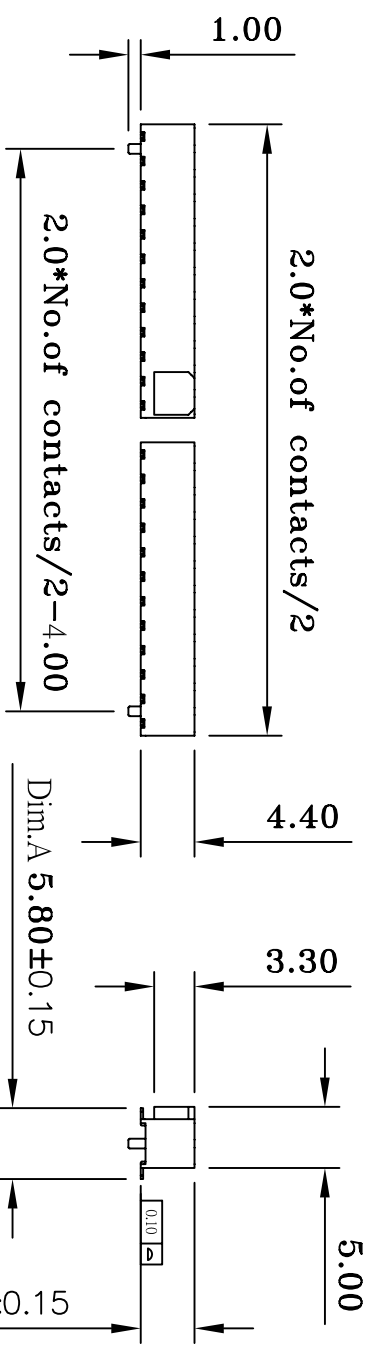


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

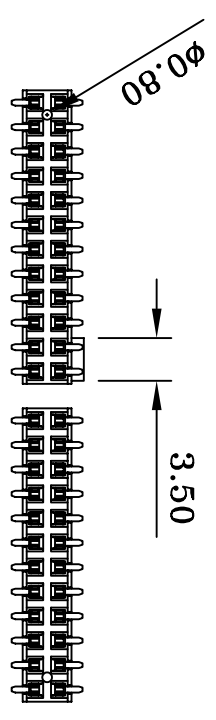

Recommended P.C. Board SMD Layout

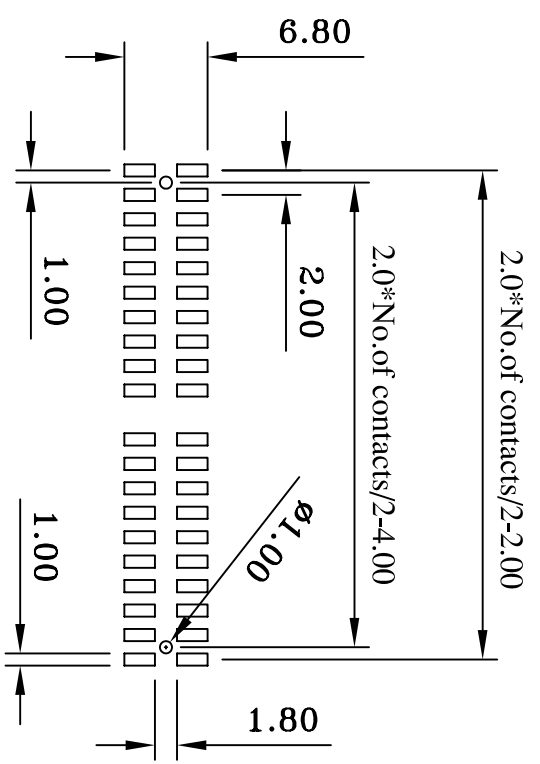

(RoHS Compliant) P2 N 44 P - 2 XX D1 BK X 000 B
 1 2 3 4 5 6 7 8

- Standard: Nylon-6T
- P=With Ke
- Per ROW 03 to 40
- Tail Style:
D1= S.M.D With Peg
5. Color: BK=Black
WH=White
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash,Matte Tin 100u"
A=Gold 3u"
B=Gold 3u",Matte Tin 100u"
- Special Options
D=Gold 5u"
E=Gold 5u",Matte Tin 100u"
G=Gold 10u"
H=Gold 10u",Matte Tin 100u"
J=Gold 15u"
I=Gold 15u"
M=Gold 15u",Matte Tin 100u"
U=Gold 30u"
V=Gold 30u",Matte Tin 100u"
- Packaging:
B= Tube

CONN TOP COMPONENT INC.
 P2N44P-2XXDBKX000B

1:	P2N44P-2XXDBKH1	DRAWING NO	P200-00027	EDITION:	C1	ITEM:	P200
2:	P200T-203314D	DRAWN BY	LN			SCALE:	1:1
3:		APPROVAL BY				UNIT:	m.m